


Alba



Decorative wall mounted lighting fitting

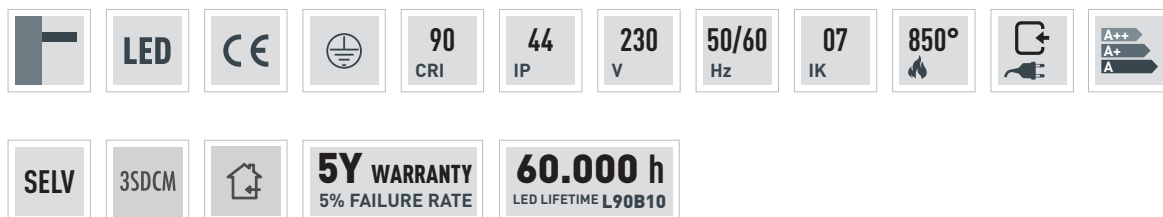

IT

Apparecchio decorativo per installazione a parete. Corpo in estruso di alluminio calandrato. Sorgente luminosa LED indiretta. Verniciatura con polveri epossidiche antigraffio. Schermo di chiusura in silicone opale. Alimentatore incorporato.

ES

Luminaria decorativa para instalación en pared. Cuerpo de aluminio extruido y calandrado. Fuente de iluminación LED indirecta. Barnizado con polvo epoxi anti-rayado. Difusor de silicona opal. Balasto integrado.

EN

Decorative wall lighting fitting. Extruded and calendered aluminium body. Indirect LED light source. Painted with scratch-resistant epoxy powders. Opal silicone closing reflector. Built-in driver.

DE

Dekoratives Wandbeleuchtungsgerät. Extrudierter und kalandrierter Aluminiumkörper. Indirekte LED-Lichtquelle. Lackiert mit kratzfesten Epoxidpulvern. Opalabdeckschirm aus Silikon. Integrierter Treiber.

FR

Appareil décoratifs au mur. Corps en aluminium extrudé et calandré. Source lumineuse LED indirecte. Finition de peinture en poudre époxy anti-rayures. Écran de fermeture en silicone opale. Alimentation avec driver intégré.



ALBA 4000 K

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver no.	Colour
YAL16N	01	1461	10	4000	D	ON/OFF	1	○

ALBA 3000 K

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver no.	Colour
YAL16W	01	1353	10	3000	D	ON/OFF	1	○


ALBA STANDARD COLOUR SELECTION

● **WI** | White Irazu ● **BLL** | Black Lava


ALBA ON REQUEST COLOUR SELECTION

● **BF** | Beige Futuna ● **SB** | Silver Bombalai ● **GK** | Gold Karkar
 ● **BL** | Bronze Lario ● **RR** | Rust Rame ● **BT** | Blue Telica

ALBA BEAM ANGLE | DIMENSIONS



Size	X (mm)	Y (mm)	Z (mm)	Kg
A	Ø 165	12	250	0,6

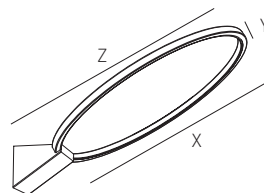

Min and Max room temperature: -20°+45° C.