


SOO vd



Decorative suspension lighting fitting

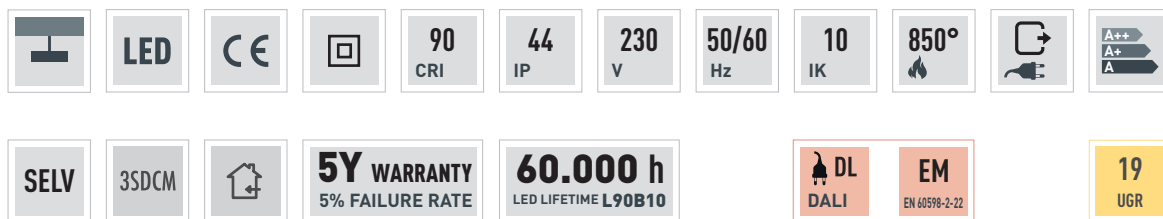

On request

Only for cod. MP

IT

Apparecchio decorativo per installazione a sospensione. Corpo ultrapiatto in estruso di alluminio calandrato. Sorgente luminosa LED diretta. Verniciatura con polveri epossidiche antigraffio. Diffusore in policarbonato opale (cod. OP), microprismato UGR 19 (cod. MP). Fornito completo di sospensioni in acciaio regolabili e cavo di alimentazione L=2m. Alimentatore incluso esterno. Rosone per collegamento elettrico non incluso, da ordinare separatamente.

EN

Decorative suspension lighting fitting. Extruded linear aluminum ultra-flat body. Direct LED light source. Painted with scratch-resistant epoxy powders. Opal polycarbonate diffuser (code OP), microprismatic UGR 19 (code MP). Supplied complete with adjustable steel suspensions and power cable L = 2m. External driver included. Rose ceiling for electrical connection not included, to be ordered separately.

FR


Appareil décoratif en suspension. Corps extra plat en aluminium extrudé linéaire. Source lumineuse LED directe. Finition de peinture en poudre époxy anti-rayures. Diffuseur en polycarbonate opal (réf. OP), microprismé UGR 19 (réf. MP). Fourni avec fils de suspensions en acier réglables et câble d'alimentation L= 2mt. Driver externe inclus. Patère et branchement électrique exclus, à commander séparément.

ES

Luminaria decorativa de suspensión. Cuerpo ultraplano de aluminio extruido calandrado. Fuente de iluminación LED directa. Barnizado con polvo epoxi anti-rayado. Difusor de policarbonato opal (código OP), microprismato UGR19 (código MP). Cables de suspensión de acero ajustables y cable de alimentación L=2m incluidos. Balasto externo incluido. Roseta electrificada no incluida, a pedir por separada.

DE

Dekoratives Hängebeleuchtungsgerät. Ultraflacher Körper aus extrudiertem, kalandriertem Aluminium. Direkte LED-Lichtquelle. Lackiert mit kratzfesten Epoxidpulvern. Diffusor aus opalem Polycarbonat (Kode OP), mikroprismatisch UGR 19 (Kode MP). Komplett mit verstellbaren Stahlhängungen und Netzkabel L = 2m. Externer elektronischer Treiber enthalten. Deckenbefestigung für elektrische Verbindung nicht enthalten, separat zu bestellen.

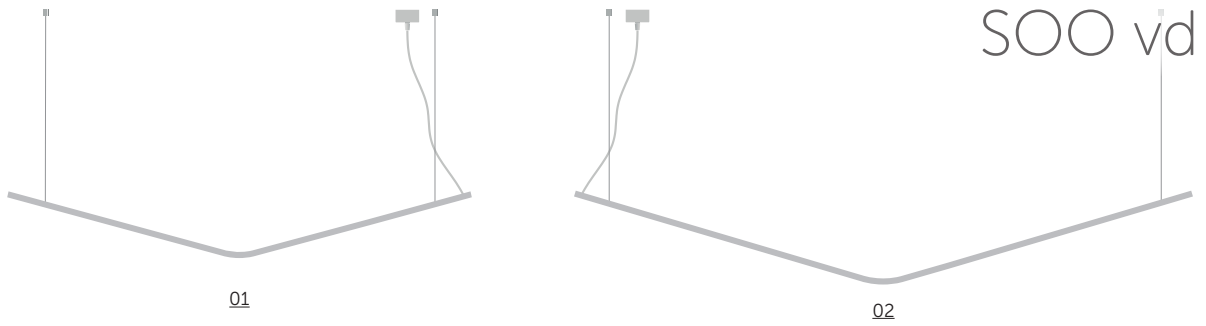

SOO vd 4000 K

| Code | Diffuser | Size | Lumen Out* | Watt Tot | K | Beam angle | Driver Type | Driver Nr. | Colour |
|---------|----------------|------|------------|----------|------|------------|-------------|------------|--------|
| YSVD16N | OP: | 01 | 5780 | 68 | 4000 | D | ON/OFF | 1 | ○ |
| YSVD15N | Opal | 01 | 2890 | 34 | 4000 | D | ON/OFF | 1 | ○ |
| YSVD21N | MP: | 02 | 7650 | 90 | 4000 | D | ON/OFF | 1 | ○ |
| YSVD20N | Microprismatic | 02 | 3825 | 45 | 4000 | D | ON/OFF | 1 | ○ |

SOO vd 3000 K

| Code | Diffuser | Size | Lumen Out* | Watt Tot | K | Beam angle | Driver Type | Driver Nr. | Colour |
|---------|----------------|------|------------|----------|------|------------|-------------|------------|--------|
| YSVD16W | OP: | 01 | 5320 | 68 | 3000 | D | ON/OFF | 1 | ○ |
| YSVD15W | Opal | 01 | 2660 | 34 | 3000 | D | ON/OFF | 1 | ○ |
| YSVD21W | MP: | 02 | 7040 | 90 | 3000 | D | ON/OFF | 1 | ○ |
| YSVD20W | Microprismatic | 02 | 3520 | 45 | 3000 | D | ON/OFF | 1 | ○ |

*Output flux with opal diffuser. With microprismatic diffuser + 10%


SOO vd STANDARD COLOUR SELECTION

● **WI** | White Irazu ● **BLL** | Black Lava


SOO vd ON REQUEST COLOUR SELECTION

● **BF** | Beige Futuna ● **SB** | Silver Bombalai ● **GK** | Gold Karkar
 ● **BL** | Bronze Lario ● **RR** | Rust Rame ● **BT** | Blue Telica

SOO vd BEAM ANGLE | DIMENSIONS




| Size | X [mm] | Y [mm] | Z [mm] | Kg |
|-----------|--------|--------|--------|-----|
| 01 | 1500 | 200 | 50 | 1,5 |
| 02 | 2000 | 300 | 50 | 1,9 |

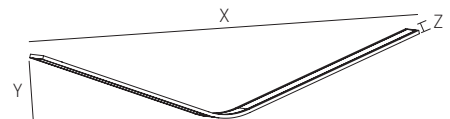

Min and Max room temperature: -20°+45° C.

SOO ACCESSORIES

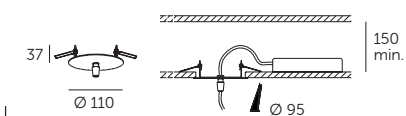


YKT10301 + ○ COLOUR

Rose ceiling for installation with ceiling panel, remote driver.



YKT10401 + ○ COLOUR

Rose ceiling for brick installation with driver housing.



YKT10501 + ○ COLOUR

Rose ceiling for brick installation without driver housing. For remote driver 24 Volt max 5 mt.