


Tink



Decorative wall mounted lighting fitting

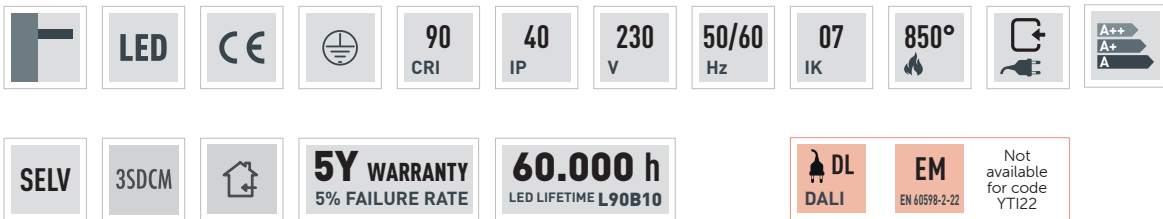

On request

IT

Apparecchio decorativo per installazione a parete. Corpo in acciaio al carbonio pressopiegato. Sorgente luminosa LED multichip. Verniciatura con polveri epossidiche antigraffio. Schermo di chiusura in policarbonato opalino. Alimentatore incorporato.

ES

Luminaria decorativa para instalación en pared. Cuerpo de acero al carbono plegado. Fuente de iluminación LED. Barnizado con polvo epoxi anti-rayado. Difusor de policarbonato opal. Balasto integrado.

EN


Decorative wall lighting fitting. Bent carbon steel body. Multichip LED light source. Painted with scratch-resistant epoxy powders. Opal polycarbonate closing reflector. Built-in driver.

DE

Dekoratives Wandbeleuchtungsgerät. Körper aus pressgeformtem Kohlenstoffstahl. LED-Lichtquelle. Lackiert mit kratzfesten Epoxidpulvern. Abdeckschirm aus opalem Polycarbonat. Integrierter Treiber.

FR

Appareil décoratifs au mur. Corps en acier au carbone plies à la presse. Source lumineuse LED. Finition de peinture en poudre époxy anti-rayures. Écran de fermeture en polycarbonate opale. Alimentation avec driver intégré.

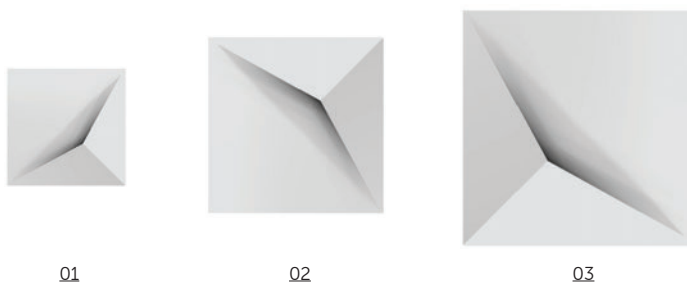

TINK 4000 K

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver no.	Colour
YTI22N	01	3013	30	4000	D	ON/OFF	1	○
YTI30N	02	6313	65	4000	D	ON/OFF	2	○
YTI50N	03	11354	111	4000	D	ON/OFF	4	○

TINK 3000

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver no.	Colour
YTI22W	01	2790	30	3000	D	ON/OFF	1	○
YTI30W	02	5845	65	3000	D	ON/OFF	2	○
YTI50W	03	10513	111	3000	D	ON/OFF	4	○


TINK STANDARD COLOUR SELECTION

● **WI** | White Irazu ● **BLL** | Black Lava


TINK ON REQUEST COLOUR SELECTION

● **BF** | Beige Futuna ● **SB** | Silver Bombalai ● **GK** | Gold Karkar
 ● **BL** | Bronze Lario ● **RR** | Rust Rame ● **BT** | Blue Telica

TINK BEAM ANGLE | DIMENSIONS



Size	X [mm]	Y [mm]	Z [mm]	Kg
01	220	220	70	1,6
02	300	300	85	2,2
03	500	500	130	3,7



Min and Max room temperature: -20°+45° C.