

TORINO 3R COMFORT

Sistema fila continua a LED per l'illuminazione generale e di accento di aree commerciali ed industriali.


Plafoniera per montaggio a plafone o sospensione **a richiesta**.

Testate di chiusura comprese.

Continuous line LED lighting system for commercial and industrial area.

Surface lighting fitting or suspension lighting fitting **(on request)**.

End covers included on both cases.

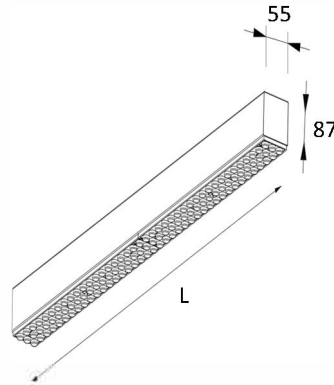

60.000 h
LED LIFETIME L80B10

Corpo in profilo di alluminio verniciato elettrostaticamente nel colore selezionato. Base cablata in profilo di alluminio.

Ottica in PMMA ad alta efficienza rendimento 92%

Sorgente luminosa LED 192lm/W at Tp.25°

Grado di deviazione cromatica: 3-step MacAdam

Emissione diretta.

Driver elettronico ON/OFF integrato

A richiesta: dimmerabile DALI (codice DL)

Trunking from aluminim profile, painted electrostatically in selected colour.

Gear tray from aluminim profile.

High efficient PMMA optics efficiency 92%

LED light source 201lm/W at Tp. 50°


Colour tolerance: 3-step MacAdam

Direct light emission.

Built-in electronic driver ON/OFF

On request: dimmable DALI (code DL)

FOTOMETRIE | PHOTOMETRIES

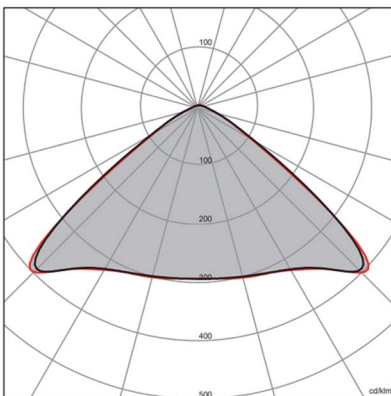

TORINO 3R COMFORT LED

IDEALLUX s.r.l. Via Casinghino 11 - 27024 Cilavegna PV - Italia
Tel. +39 0381 969 814 Fax + 39 0381 669 709 www.ideallux.it

TORINO 3R COMFORT

Lumen	Watt	Lumen Watt	L Lunghezza L Length	K	Fascio Beam	Alimentazione Power Supply	Colore Colour
12288 16320	64 85	192 192	1500 2000	N: 4000	LA: fascio largo <i>wide beam</i>	-: CAE A RICHIESTA <i>ON REQUEST</i> DL: DALI	● 01: Bianco White ● 03: Nero Black

V[| | ^ : a s ^ a q | a s a B e a k E A E A V | | a s & ^ A - @ A s a B e a k E A E A