

TORINO 3R LED

Sistema fila continua a LED per l'illuminazione generale e di accento di aree commerciali ed industriali.


Plafoniera per montaggio a plafone o sospensione **a richiesta**.

Testate di chiusura comprese.

Continuous line LED lighting system for commercial and industrial area.

Surface lighting fitting or suspension lighting fitting **(on request)**.

End covers included on both cases.

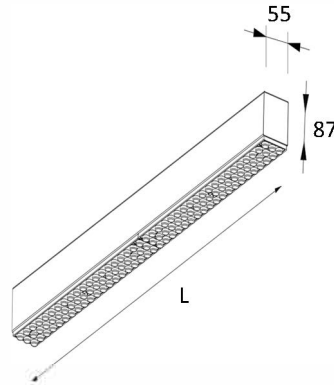

60.000 h
LED LIFETIME L80B10

Corpo in profilo di alluminio, verniciato elettrostaticamente nel colore selezionato.

Base cablata in profilo di alluminio.

Ottica lenticolare in PMMA ad alta efficienza rendimento 92%

Sorgente luminosa LED 176lm/W at Tp. 25°

Emissione diretta.

Driver elettronico ON/OFF integrato

A richiesta: dimmerabile DALI (codice DL)

Trunking from aluminim profile, painted electrostatically in selected colour.

Gear tray from aluminim profile.

Lenticular high efficient PMMA optics efficiency 92%


LED light source 176lm/W at Tp. 25°

Direct light emission.

Built-in electronic driver ON/OFF

On request: dimmable DALI (code DL)

FOTOMETRIE | PHOTOMETRIES

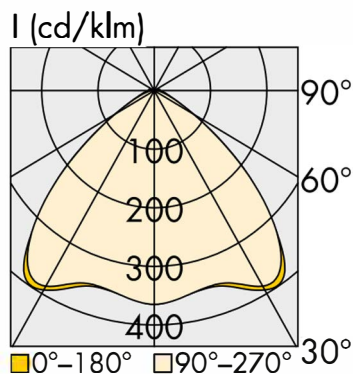

TORINO 3R LED

TORINO 3R

| Lumen | Watt | Lumen Watt | L Lunghezza L Length | K | Fascio Beam | Alimentazione Power Supply | Colore Colour |
|-------|------|---------------|-------------------------|---------|-------------------------------|---|-----------------------|
| 11264 | 64 | 176 | 1140 | N: 4000 | LA: fascio largo wide beam | -: CAE A RICHIESTA ON REQUEST DL: DALI | ● 01: Bianco White |
| 16896 | 96 | 176 | 1720 | | | | ● 03: Nero Black |

Tolleranza dei valori indicati: +/- 10%. |
Tolerance of the indicated value: +/- 10%