

# TORINO LED

Apparecchio LED a sospensione/plafone con la possibilità di avere un sistema fila continua a LED  
Plafoniera per montaggio a plafone o sospensione **a richiesta**.


Testate di chiusura comprese.

Suspension/ceiling LED lighting fixture with the possibility to realise a continuous line LED lighting system

*Surface lighting fitting or suspension lighting fitting (on request).*

*End covers included on both cases.*

**50.000 h**  
LED LIFETIME L80B10



Corpo in profilo di alluminio, verniciato elettrostaticamente nel colore selezionato.

Diffusore ad alta efficienza in PMMA opalino rendimento 70%.

Sorgente luminosa LED 186lm/W at Tp. 25°

Emissione diretta.

Driver elettronico ON/OFF integrato

A richiesta: dimmerabile DALI (codice DL)

*Trunking from aluminim profile, painted electrostatically in selected colour.*

*High efficient diffuser in opal PMMA efficiency 70%.*

*LED light source 186lm/W at Tp. 25°*


*Direct light emission.*

*Built-in electronic driver ONIOFF*

*On request: dimmable DALI (code DL)*

## FOTOMETRIE | PHOTOMETRIES

10000 10000 10000 10000 10000 10000 10000 10000 10000 10000

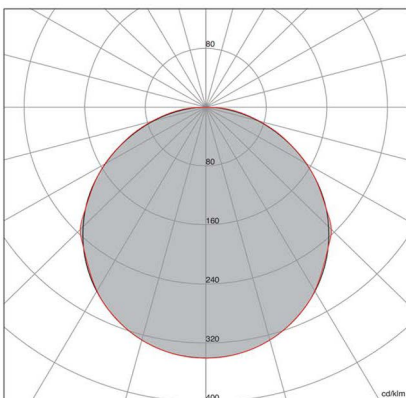

### TORINO LED

IDEALLUX s.r.l. Via Casinghino 11 - 27024 Cilavegna PV - Italia  
Tel. +39 0381 969 814 Fax + 39 0381 669 709 [www.ideallux.it](http://www.ideallux.it)

**TORINO LED OPAL**

Lumen	Watt	Lumen Watt	L Lunghezza L Length	K	Fascio Beam	Alimentazione Power Supply	Colore Colour
8184 12090	44 65	186 186	1140 1700	N: 4000	OP : Opale Opal	-: ON/OFF A RICHIESTA ON REQUEST DL: DALI	● 01 : Bianco White ● 03 : Nero Black

Tolleranza dei valori indicati: +/- 10%. |  
Tolerance of the indicated value: +/- 10%