



Trem

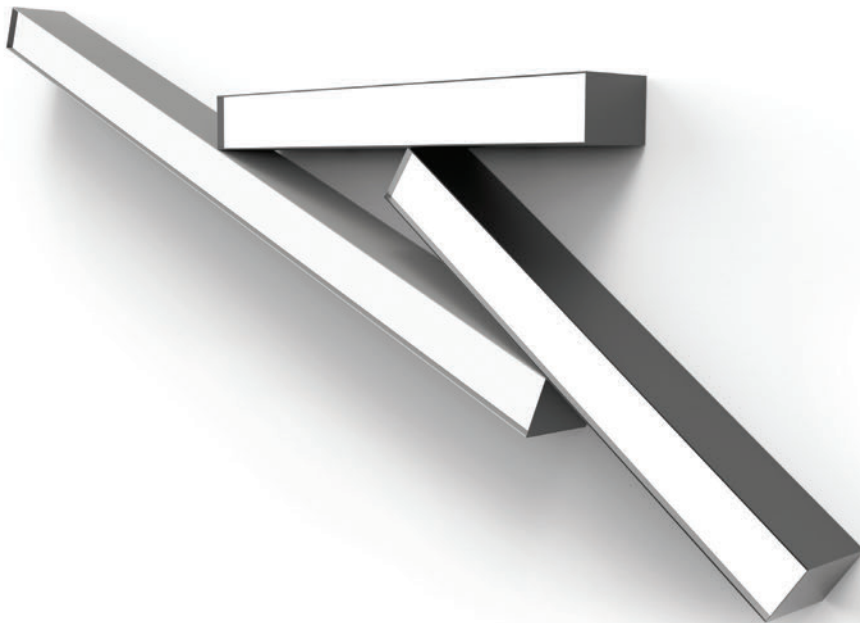

Decorative or ceiling wall mounted lighting fitting

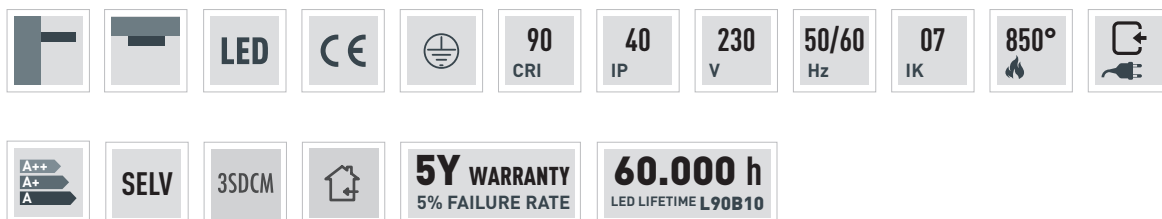

IT

Apparecchio decorativo per installazione a parete o plafone. Corpo in acciaio al carbonio pressopiegato. Sorgente luminosa LED multichip. Verniciatura con polveri epossidiche antigraffio. Schermo di chiusura in policarbonato opale. Alimentatore incorporato.

ES

Luminaria decorativa para instalación en pared y techo. Cuerpo de acero al carbono plegado. Fuente de iluminación LED. Barnizado con polvo epoxi anti-rayado. Difusor de policarbonato opal. Balasto integrado.

EN

Apparecchio decorativo per installazione a parete o plafone. Corpo in acciaio al carbonio pressopiegato. Sorgente luminosa LED multichip. Verniciatura con polveri epossidiche antigraffio. Schermo di chiusura in policarbonato opale. Alimentatore incorporato.

DE

Dekoratives Wand- und Deckenbeleuchtungsgerät. Körper aus pressgeformtem Kohlenstoffstahl. LED-Lichtquelle. Lackiert mit kratzfesten Epoxidpulvern. Abdeckschirm aus opalem Polycarbonat. Integrierter Treiber.

FR

Appareil décoratifs au mur ou plafond. Corps en acier au carbone plies à la presse. Source lumineuse LED. Finition de peinture en poudre époxy anti-rayures. Écran de fermeture en polycarbonate opal. Alimentation avec driver intégré.

Trem



TREM 4000 K

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver no.	Colour
YTR15N	01	6622	61	4000	D	ON/OFF	2	○

TREM 3000 K

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver no.	Colour
YTR15W	01	6132	61	3000	D	ON/OFF	2	○


TREM STANDARD COLOUR SELECTION

- **WI** | White Irazu
- **BLL** | Black Lava


TREM ON REQUEST COLOUR SELECTION

- **BF** | Beige Futuna
- **SB** | Silver Bombalai
- **GK** | Gold Karkar
- **BL** | Bronze Lario
- **RR** | Rust Rame
- **BT** | Blue Telica

TREM BEAM ANGLE | DIMENSIONS



Size	X [mm]	Y [mm]	Z [mm]	Kg
01	1500	90	500	9,0



Min and Max room temperature: -20°+45° C.