



ALGEBRA MP

CE			IP43D	220-240 V	50/60 Hz	IK07	Ra>80
RG0	3SDCM	850°	SELV	UGR19			

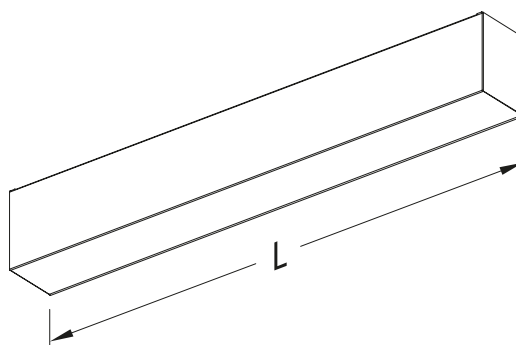

APPLICAZIONE

Apparecchio LED per montaggio a plafone. Montaggio a sospensione od incasso trimless a richiesta. Schermo Microprismato.

CARATTERISTICHE PRODOTTO

Corpo in lamiera d'acciaio pressopiegata verniciata con polveri epossidiche previa fosfatazione.

Ottiche in alluminio ad alto rendimento con funzione di dissipatore.

Schermo in policarbonato microprismato.

Sistema di fissaggio a plafone. A richiesta a sospensione o ad incasso trimless.

Testate di chiusura incluse.

Sorgente luminosa LED.

Emissione diretta.

Non idonea per l'applicazione esterna.

Alimentazione elettronica CAE.

A richiesta: dimmerabile DALI (cod. DL) specificare se con funzione PUSH DIM (cod. PD).

APPLICATION

LED lighting fitting for ceiling fixing system. On request suspension or recessed trimless fixing system. Microprismatic diffuser.

PRODUCT CHARACTERISTICS

Bent sheet steel body painted with epoxy powders after phosphating.

High performance aluminium louvers with heatsink function.

Microprismatic polycarbonate diffuser.

Ceiling fixing system. On request: Suspension or recessed fitting system.

Endcovers included.


LED light source.

Direct light emission.

Not suitable for outdoor application.

Built in electronic driver CAE. On request: dimmable DALI (code DL) PUSH DIM function (code PD) to be requested.

CURVA FOTOMETRICA/PHOTOMETRIC CURVE

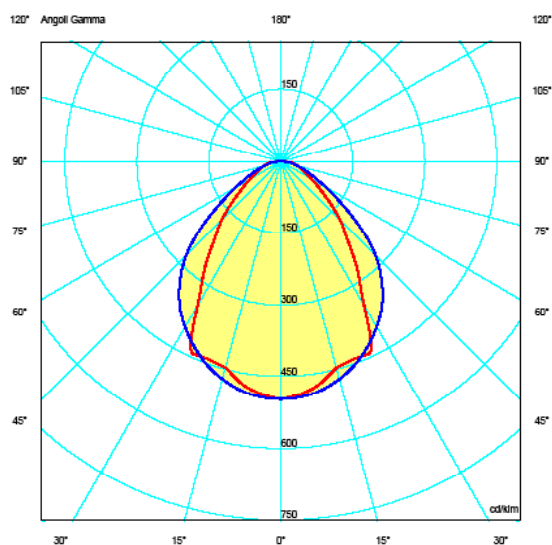



Durata vita/ Service life:

60.000h L90B10

100.000h L70B50



Relamping	Lumen LED*	Watt LED**	Lumen Out***	Watt	Lumen Watt Out	L lunghezza L Length	Configurazione- LED	Codice Code	K	Alimentazione Power Supply
1X58	4100	20	2800	21,5	> 130	762 mm	=====	AGLMP2020		W: 3.000 N: 4.000 — : CAE elettronica electronic DL: DALI (funzione PD a richiesta/ On request)
1X58	4940	25	3153	26,5	> 119	762 mm	=====	AGLMP2029		
2x36	6300	30	4225	32,5	> 130	1137 mm	=====	AGLMP2030		
2x36	7360	36,5	4641	39	> 119	1137 mm	=====	AGLMP2042		
2x58	8400	40	5551	42,5	> 130	1512 mm	=====	AGLMP2039		
2x58	9880	49	6190	52	> 119	1512 mm	=====	AGLMP2057		

A richiesta
On request

Colore / Colour:

01 bianco / white RAL9016

Temperatura ambiente minima e massima (-5° +40°) | Minimum and maximum room temperature (-5° +40°)

* Lumen nominali LED max a 25° | Nominal lumen at max 25°

** Potenza dei LED | LED power

*** Flusso totale in uscita dall'apparecchio a temperatura di lavoro (Ta 25°)
Total lighting fitting flux output at working temperature (Ta 25°)

ACCESSORI

- AGS-TR** Staffa per installazione trimless. Spessore controsoffitto da definire.
- KT10410** Kit sospensione n. 1 cavo d'acciaio L= 2000 mm, n.1 perno regolazione millimetrica, n.1 rosone cilindrico.
- KT10420** Kit sospensione n.2 cavi d'acciaio L=2000mm, n. 2 perni regolazione millimetrica, n. 2 rosoni cilindrici.
- KT10206** Kit rosone elettrificato complete di cavo trasparente L=2000 mm 3x0,75 mmq, per soluzioni CAE.
- KT10206/D** Kit rosone elettrificato complete di cavo trasparente L=2000 mm 5x0,75 mmq, per soluzioni EM/DL.

ACCESSORIES

- AGS-TR** Bracket for trimless installation. False ceiling thickness to be defined.
- KT10410** Suspension kit no. 1 steel cable L= 2000 mm, no.1 precision adjustment pin, no. 1 cylindrical ceiling rose
- KT10420** Suspension kit no. 2 steel cables L= 2000 mm, no.2 precision adjustment pins, no. 2 cylindrical ceiling roses
- KT10206** Electrified ceiling rose complete with transparent cable L=2000 mm 3x0,75 mmq, for CAE version.
- KT10206/D** Electrified ceiling rose complete with transparent cable L=2000 mm 5x0,75 mmq, for EM/DL version.