


Amadeus



Floor decorative lighting

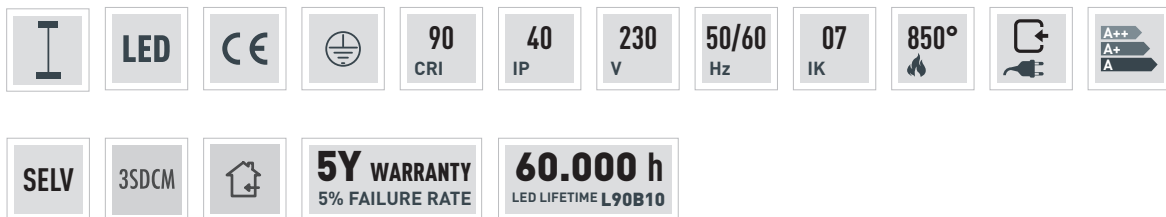

IT

Lampada da terra decorativa. Corpo in acciaio al carbonio pressopiegato. Sorgente luminosa LED multichip. Verniciatura con polveri epossidiche antigraffio. Schermo di chiusura in policarbonato opale. Alimentatore incorporato.

ES

Luminaria de suelo decorativa. Cuerpo de acero al carbono plegado. Fuente de iluminación LED multichip. Recubierta con polvo epoxi anti-rayado. Difusor de policarbonato opal. Balasto integrado.

EN

Floor decorative lighting. Bent carbon steel body. Multichip LED lighting source. Anti-scratch epoxy powder paint finish. Opal polycarbonate closing reflector. Built-in driver.

DE

Dekoratives Stehleuchte. Körper aus pressgeformtem Kohlenstoffstahl. Multichip LED-Leuchtmittel. Lackierung mit kratzfesten Epoxypulvern. Abdeckschirm aus opalem Polycarbonat. Integrierter Treiber.

FR

Décoratif lampe au sol. Corps en acier au carbone courbé. Source de lumière en LED multichip. Finition de peinture en poudre époxy anti-rayures. Écran de fermeture en polycarbonate opale. Alimentation avec driver intégré.

Amadeus



AMADEUS 4000 K

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver no.	Colour
YAM84N	01	5843	53	4000	D	ON/OFF	1	○

AMADEUS 3000 K

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver no.	Colour
YAM84W	01	5410	53	3000	D	ON/OFF	1	○


AMADEUS STANDARD COLOUR SELECTION

● **WI** | White Irazu ● **BLL** | Black Lava


AMADEUS ON REQUEST COLOUR SELECTION

● **BF** | Beige Futuna ● **SB** | Silver Bombalai ● **GK** | Gold Karkar
 ● **BL** | Bronze Lario ● **RR** | Rust Rame ● **BT** | Blue Telica

AMADEUS BEAM ANGLE | DIMENSIONS



Size	X [mm]	Y [mm]	Z [mm]	K [mm]	Kg
01	∅ 320	340	1670	27	15,0



Min and Max room temperature: -20°+45° C.