


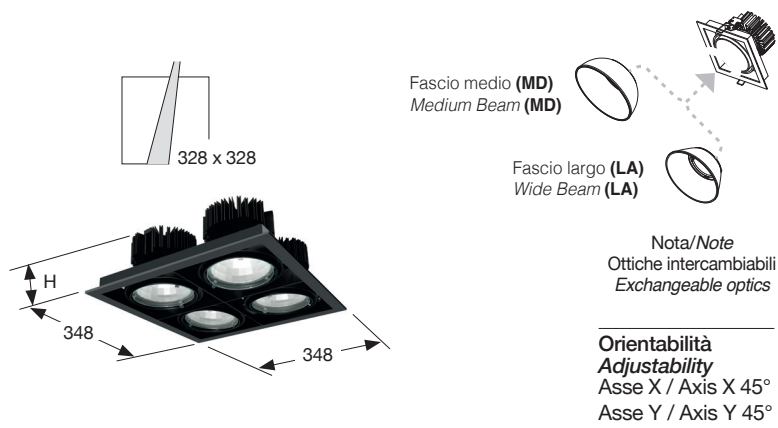

AUTOMA LED 4

FASCIO/BEAM/FAISCEAU/HAZ MD | LA

Apparecchio LED da incasso orientabile 4 luci.
Adjustable recessed LED downlight 4 lights.
Luminaire LED encastré orientables 4 lumières.
Luminaria LED de empotrar orientables 4 luzes.

Corpo ed anello in pressofusione d'alluminio verniciato con polveri epossidiche previa fosfatazione. Dissipatore in alluminio estruso. Ottica in policarbonato lenticolare fascio largo (cod. LA) fascio medio (cod. MD). Sorgente luminosa LED. Emissione diretta. Fissaggio ad incasso mediante molle. Alimentazione elettronica separata ON/OFF. A richiesta: dimmerabile DALI (cod. DL). Specificare se con funzione Push Dim (cod. PD). Emergenza autonomia 1h/3h.

Die-cast aluminium body and ring painted with epoxy powder after phosphating. Extruded aluminium heatsink. Lenticular polycarbonate louver wide beam (code LA) medium beam (code MD). LED light source. Direct light emission. Recessed fixing system with springs. Separate electronic driver ON/OFF. On request: dimmable DALI (code DL). Push Dim function to be specified (code PD). Emergency autonomy 1h/3h.

Corps et bague en aluminium moulé sous pression avec traitement époxy. Optique lenticulaire en polycarbonate à faisceau large (réf. LA), faisceau moyen (réf. MD). Source lumineuse LED. Emission directe. Fixation à encastrement au moyen de ressorts. Alimentation électronique ON/OFF séparée. Sur demande: dimmable DALI (réf. DL), spécifier la fonction PUSH DIM (réf. PD). Autonomie d'urgence 1h/3h.

Cuerpo y anillo de aluminio fundido a presión recubierto con polvo epoxi previamente fosfatado. Óptica lenticular de policarbonato de haz amplio (cód. LA) haz medio (cód. MD). Fuente de iluminación LED. Emisión directa. Instalación empotrable con muelles. Alimentación electrónica ON/OFF separada. A pedido: regulación DALI (cód. DL). Especificar si se requiere con función PUSH DIM (cód. PD). Autonomía de emergencia 1h/3h.



Lumen	Watt	Lumen Watt Out	mA	Codice Code	K	Fascio Beam	Alimentazione Power Supply	Colore Colour
5950	4x12	≤ 124	350	HRAA41	W:3000 N:4000	MD: fascio medio medium beam LA: fascio largo wide beam	-: ON/OFF DL: DALI	Standard: ● WI: White Irazu ● BLL: Black Lava Su richiesta / On request: ● SB: Silver Bombalai ● BL: Bronze Lario ● RR: Rust Rame ● BF: Beige Futura ● GK: Gold Karkar ● BT: Blue Telica
7870	4x16	≤ 123	450	HRAA42				
9620	4x20	≤ 120	550	HRAA43				
11070	4x23,5	≤ 118	650	HRAA44				
11290	4x26,5	≤ 116	700	HRAA45				
15490	4x32,5	≤ 119	900	HRAA46				
17660	4x38,5	≤ 115	1050	HRAA47				




A richiesta | On request


Temperatura ambiente min. - max: -10°+40° C.
Lumen: flusso totale in uscita con 3000K CRI90;
Variazione flusso con CRI85 + 8%, con CRI95 - 8%.
Watt: potenza di sistema
Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.
Lumen: total output flux with 3000K CRI90;
Flux variation with CRI85 + 8%, with CRI95 - 8%.
Watt: system power
Tolerance ± 10%

Ottica MD 25°



Ottica LA 38°



H (m)	Ø (m)	H (m)	Ø (m)
1	0.4	1	0.7
2	0.8	2	1.4
3	1.3	3	2.1
4	1.7	4	2.7
5	2.1	5	3.4