


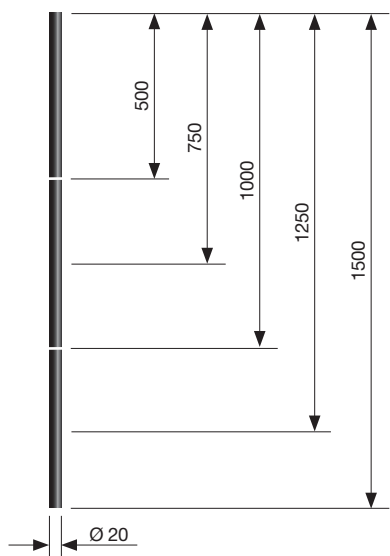

DECOR MINI

FASCIO/BEAM MD

Sospensione tubolare decorativa Ø 20.
Decorative tubular sunspension Ø 20.

5Y WARRANTY
5% FAILURE RATE

60.000 h
LED LIFETIME L70B10

100.000 h
LED LIFETIME L70B50

Corpo in estruso d'alluminio verniciato con polveri epossidiche previa fosfatazione. Dissipatore in alluminio estruso. Ottica in policarbonato lenticolare fascio medio (cod. MD). Sorgente luminosa LED. Emissione diretta. Sistema di fissaggio a sospensione (completo di cavo L. 2 mt e rosone). Alimentazione 24 Vcc elettronica esterna CAE. Alimentatore non incluso, da ordinare separatamente. A richiesta: dimmerabile 24 Vcc esterna DALI (cod. DL) specificare se con funzione PUSH DIM (cod. PD).

Extruded aluminium body painted with epoxy powders after phosphating. Extruded aluminium heatsink. Lenticular polycarbonate louver medium beam (code MD). LED light source. Direct light emission. Suspension mounting system (complete with cable 2 mt lenght and ceiling rose). External electronic driver CAE 24 Vcc. Driver not included, to be ordered separately. On request: external dimmable DALI 24 Vcc (code DL) PUSH DIM function (code PD) to be requested.

Lumen	Watt	Lumen Watt Out	Vcc	Codice Code	Fascio Beam	K	Alimentazione Power Supply	Colore Colour
DECOR M50 220	2,1	≤ 104	24	HRDM1	MD: fascio medio medium beam	WW: 2700 W:3000 N:4000	-: CAE elettronica electronic DL: DALI	Standard: ● WI: White Irazu ● BL: Black Lava Su richiesta /On request: ● SB: Silver Bombalai ● BL: Bronze Lario ● RR: Rust Rame ● BF: Beige Futura ● GK: Gold Karkar ● BT: Blue Telica
DECOR M75 220	2,1	≤ 104	24	HRDM2				
DECOR M100 220	2,1	≤ 104	24	HRDM3				
DECOR M125 220	2,1	≤ 104	24	HRDM4				
DECOR M150 220	2,1	≤ 104	24	HRDM5				

CE

III

>90
CRI

3SDCM

IP44
EN 60529

IK 07
EN 60068

24 V
2014/35/EU

850°
EN 60695

Asie
EN 62471

RG 0
EN 62471

House

DL
DALI


PD
PUSH DIM

Temperatura ambiente min. - max: -10°+40° C.
Lumen: flusso totale in uscita con 3000K CRI90;
Variazione flusso con CRI85 + 8%, con CRI95 - 8%.
Watt: potenza di sistema
Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.
Lumen: total output flux with 3000K CRI90;
Flux variation with CRI85 + 8%, with CRI95 - 8%.
Watt: system power
Tolerance ± 10%

A richiesta | On request

Ottica MD 24°



H (m)	Ø (m)
1	0.4
2	0.8
3	1.3
4	1.7
5	2.1