

H 95 = 500 mA
 H 95 = 600 mA
 H 125 = 700 mA
 H 125 = 800 mA

Nota/Note
 Ottiche intercambiabili
 Exchangeable optics

Orientabilità
 Adjustability
 Asse X / Axis X 45°

ENNE ORIENT LENS

FASCIO/BEAM ST | MD | LA

Apparecchio LED da incasso orientabile
 Adjustable recessed downlight.

Corpo in lamiera tornita, gruppo orientabile pressofuso in alluminio verniciato con polveri epossidiche previa fosfatazione. Dissipatore in alluminio estruso. Ottica in policarbonato lenticolare fascio largo (cod. LA) fascio medio (cod. MD) fascio stretto (cod. ST). Sorgente luminosa LED. Emissione diretta. Fissaggio ad incasso mediante molle. Alimentazione elettronica separata CAE. A richiesta: dimmerabile DALI (cod. DL). Specificare se con funzione Push Dim (cod. PD). Emergenza autonomia 1h/3h.

Turned sheet metal body, die-cast aluminium adjustable group painted with epoxy powder after phosphating. Extruded aluminium heatsink. Lenticular polycarbonate louver wide beam (code LA) medium beam (code MD) narrow beam (code ST). LED light source. Direct light emission. Recessed fixing system with springs. Separate electronic driver CAE. On request: dimmable DALI (code DL). Push Dim function to be specified (code PD). Emergency autonomy 1h/3h.

5Y WARRANTY
5% FAILURE RATE

60.000 h
LED LIFETIME L90B10

100.000 h
LED LIFETIME L70B50

Lumen	Watt	Lumen Watt Out	mA	Codice Code	Fascio Beam	K	Alimentazione Power Supply	Colore Colour
2150	18	≤ 120	500	HRENOL1	ST: fascio stretto narrow beam	WW: 2700	-: CAE elettronica electronic	Standard: ● W1: White Irazu ● BLL: Black Lava
2550	22	≤ 116	600	HRENOL2	MD: fascio medio medium beam	W: 3000	DL: DALI	Su richiesta / On request: ● SB: Silver Bombalai ● BL: Bronze Lario ● RR: Rust Rame ● BF: Beige Futura ● GK: Gold Karkar ● BT: Blue Telica
2950	26	≤ 114	700	HRENOL3	LA: fascio largo wide beam	X: 3500		
3350	30	≤ 112	800	HRENOL4		N: 4000		

CE
EMC
>90 CRI
3SDCM
IP44 EN 60529
IK 07 EN 60068
230 V 2014/35/EU
50/60 Hz
850° EN 60895
LED
RG 0 EN 62471
DL DALI
PD PUSH DIM
DIM W
>80 CRI
>95 CRI
VIVID PLUS
VEG PLUS
WHITE PLUS
MEAT PLUS
EM

A richiesta | On request


Temperatura ambiente min. - max: -10°+40° C.
 Lumen: flusso totale in uscita con 3000K CRI90;
 Variazione flusso con CRI85 + 8%, con CRI95 - 8%.
 Watt: potenza di sistema
 Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.
 Lumen: total output flux with 3000K CRI90;
 Flux variation with CRI85 + 8%, with CRI95 - 8%.
 Watt: system power
 Tolerance ± 10%

Ottica ST 12°

Ottica MD 25°

Ottica LA 38°

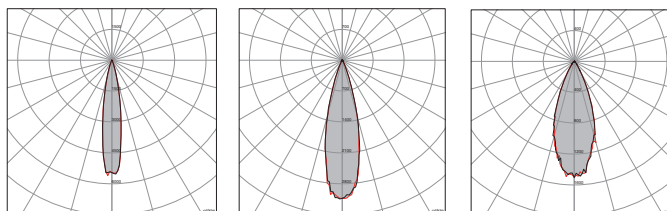

H (m)	Ø (m)	H (m)	Ø (m)	H (m)	Ø (m)
1	0.2	1	0.4	1	0.7
2	0.4	2	0.8	2	1.4
3	0.6	3	1.3	3	2.1
4	0.8	4	1.7	4	2.7
5	1.0	5	2.1	5	3.4