


ITALÌ SUSPENSION - 600x600

DIRECT

Panel LED. Ottica microprismata a bassa luminanza.
Panel LED. Low UGR microprismatic louver.




L1 (length)	600 mm
L2 (width)	600 mm
H (Height)	40 mm
Weight	4,0 Kg

Corpo in lamiera d'acciaio presso-piegata, verniciata con polveri epossidiche previa fosfatazione.
Ottica microprismata a bassa luminanza idonea per ambienti con videoterminali (inferiore a 1000cd/m² per angoli >65°).
Installazione a sospensione con cavi regolabili (lunghezza standard 2m). Accessorio per installazione (bifido) e rosone elettrificato inclusi.
Sorgente luminosa LED.
Emissione diretta.
Non idonea per l'applicazione esterna.
Alimentatore elettronico incluso.
Opzioni disponibili: dimmerabile DALI (PUSH-DIM a richiesta), VARIO LUMEN®.

*Bent sheet steel body painted with epoxy powders after phosphating.
Low UGR microprismatic louver suitable in rooms with VDT (lower than 1000cd/m² for angles >65°).
Suspended installation with adjustable steel cables (standard length 2m). Installation accessories (bidifo) and electrified ceiling rose included.
LED light source.
Direct light emission.
Not suitable for outdoor use.
Built-in electronic power.
Available power supply: dimmable DALI (PUSH-DIM on request), VARIO LUMEN®.*

FOTOMETRIE | PHOTOMETRIES

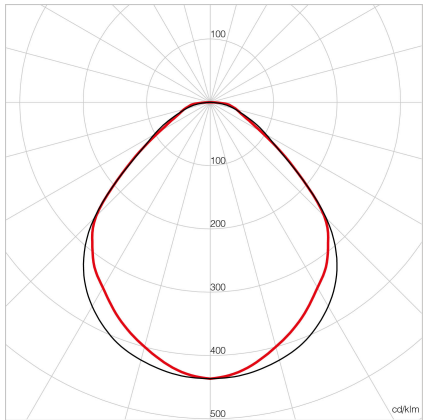

ITALI SUSPENSION DIRECT (600X600)



5Y WARRANTY

5% FAILURE RATE

60.000 h

LED LIFETIME L90B10

100.000 h

LED LIFETIME L70B50

Relamping	Lumen LED*	Watt LED**	Lumen Out***	Watt	Lumen Watt Out	Codice Code	K	Alimentazione Power Supply	Colore Colour
4X18	4160	25,5	3200	26,5	> 121	ITS807	W: 3.000 N: 4.000 C:: 6.000	DL: DALI	01: bianco white
4X18	3830	25,5	2950	26,5	> 111	ITS907			
4X18	2080-4160	11-25,5	1760-3200	13-26,5	> 135 - >121	ITS807	W: 3.000 N: 4.000 C:: 6.000	VL: VARIO LUMEN	01: bianco white
4X18	1915-3830	22-51	1590-2950	13-26,5	> 123 - >111	ITS907			

CE

>80 CRI

>90 CRI

IP44
EN 60529

230 V
2014/35/UE

50/60 Hz

IK 05
EN 60068

850°
EN 60695

RG 0
EN 62471

A++
A+
A

01 WHITE

CAM

19 UGR

TEMPERATURA AMBIENTE MIN E MAX | MIN AND MAX ROOM TEMPERATURE: (-20° +45°)

* Lumen nominali LED max a 25° | Nominal lumen at max 25°

** Potenza dei LED | LED power

*** Flusso totale in uscita dall'apparecchio a temperatura di lavoro (Ta 25° - 4.000 K) | Total lighting fitting flux output at working temperature (Ta 25° - 4.000 K) | (3.000 K -8% - CRI 90 -10%)

On request

EMERGENCY: (EM) 1h | (E3) 3h | (ED) Dali 1h | (EE) Dali 3h | (EZ) Ups | (ET) Self-diagnosis

PUSH DIM (PD) Only for DALI | 2700 K (WW) | 5000 K (R) | SPECIAL ANTIBACTERIAL PAINT (ABP)

EM EMERGENCY
EN 60598-2-22

PD
PUSH DIM

WW
2700 K

R
5000 K

SPECIAL
ANTI
BACTERIAL
PAINT

Tolleranza dei valori indicati: +/- 10%. | Tolerance of the indicated value: +/- 10%

Con Ra> 90 riduzione del flusso luminoso pari al 10%. | With CRI > 90 reduction of luminous flux is equal to 10%.

IDEALLUX s.r.l. si riserva il diritto di apportare modifiche migliorative sul prodotto in qualsiasi momento. | IDEALLUX s.r.l. reserves the right to make improvements to the product at any time.

ITALÌ SUSPENSION DIRECT VARIO LUMEN® (600x600)



DIP Switch for
VARIO LUMEN®

Code	mA	Lm LED *	Watt LED **	Lm Out ***	Watt Out	Lm / Watt Out
VARIO LUMEN®						
ITS807NVL01	350	2080	11	1760	13	>135
	375	2220	12	1850	14	>132
	400	2380	13	1965	15	>131
	425	2520	14	2065	16	>129
	450	2670	15	2175	17	>128
	475	2820	16	2300	18	>128
	500	2970	17	2415	19	>127
	525	3120	18	2540	20	>127
	550	3260	19	2640	21	>126
	575	3420	20	2750	22	>125
	600	3560	21	2870	23	>125
	625	3700	22	2940	24	>123
	650	3860	23,5	2965	24,5	>121
	675	4004	24,5	3080	25,5	>121
	700	4160	25,5	3200	26,5	>121

ITS907NVL01	350	1915	11	1590	13	>123
	375	2050	12	1690	14	>121
	400	2190	13	1800	15	>120
	425	2320	14	1900	16	>119
	450	2460	15	2000	17	>118
	475	2590	16	2100	18	>117
	500	2730	17	2210	19	>117
	525	2870	18	2300	20	>116
	550	3000	19	2420	21	>116
	575	3150	20	2530	22	>115
	600	3270	21	2600	23	>113
	625	3400	22	2700	24	>113
	650	3550	23,5	2730	24,5	>112
	675	3690	24,5	2840	25,5	>111
	700	3830	25,5	2950	26,5	>111

* Nominal lumen at max 25° | ** LED power | *** Total lighting fitting flux output at working temperature (Ta 25° - 4.000 K)



On Request

Tolleranza dei valori indicati: +/- 10%. | Tolerance of the indicated value: +/- 10%
Con Ra> 90 riduzione del flusso luminoso pari al 10%. | With CRI > 90 reduction of luminous flux is equal to 10%.
IDEALLUX s.r.l. si riserva il diritto di apportare modifiche migliorative sul prodotto in qualsiasi momento. |
IDEALLUX s.r.l. reserves the right to make improvements to the product at any time.