


Libra



Decorative suspension, ceiling and wall lighting fitting

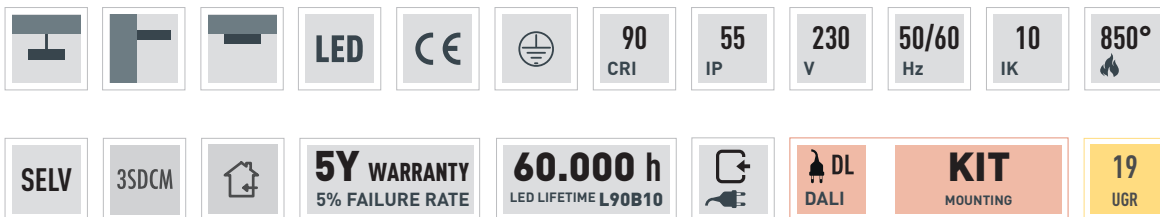

On request

IT

Apparecchio decorativo per installazione a sospensione, parete e plafone. Corpo diffusore in policarbonato trasparente. Riflettore in alluminio con chiusura in policarbonato microprismato. Terminali di chiusura in alluminio torniti. Sorgente luminosa LED multichip. Alimentatore incorporato. Rosone con collegamento elettrico e accessori di fissaggio non inclusi, da ordinare separatamente.

ES

Luminaria decorativa para instalación en suspensión, pared y techo. Cuerpo difusor de policarbonato transparente. Reflector de aluminio con terminación de policarbonato microprismático. Tapas de aluminio torneado. Fuente de iluminación LED. Balasto integrado. Roseta electricada y accesorios de fijación no incluidos, a pedir por separado.

EN

Decorative suspension, ceiling and wall lighting fitting. Transparent polycarbonate diffuser body. Aluminium reflector with microprismatic polycarbonate closure. Turned aluminium end covers. LED light source. Integrated driver. Rose ceiling for electrical connection and fixing accessories not included, to be ordered separately.

DE

Dekoratives Hänge-, Decken- und Wandbeleuchtungsgerät. Diffusor Körper aus transparentem Polycarbonat. Aluminium Reflektor mit Mikroprismenverschluss aus Polycarbonat. Endkappen aus gedrehtem Aluminium. LED-Lichtquelle. Integrierter Treiber. Deckenbefestigung für elektrische Verbindung und Befestigungszubehör nicht inbegriffen, separat zu bestellen.

ER

Appareil décoratifs en suspension, au plafond, au mur. Corp diffusant en polycarbonate transparent. Réflecteur en aluminium avec fermeture en polycarbonate microprismé. Terminaux de fermeture en aluminium décollé. Source lumineuse LED. Alimentation avec driver intégré. Patère et branchement électrique, et accessoire de fixation non inclus, à commander séparément.



LIBRA 4000 K

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver	Colour
YLI11N	01	5654	43	4000	D	ON/OFF	1	○
YLI15N	02	7538	57	4000	D	ON/OFF	1	○

LIBRA 3000 K

Code	Size	Lumen Out	Watt Tot	K	Beam angle	Driver Type	Driver	Colour
YLI11W	01	5235	43	3000	D	ON/OFF	1	○
YLI15W	02	6980	57	3000	D	ON/OFF	1	○


LIBRA STANDARD COLOUR SELECTION

● **WI** | White Irazu ● **BLL** | Black Lava


LIBRA ON REQUEST COLOUR SELECTION

● **BF** | Beige Futuna ● **SB** | Silver Bombalai ● **GK** | Gold Karkar
 ● **BL** | Bronze Lario ● **RR** | Rust Rame ● **BT** | Blue Telica

LIBRA BEAM ANGLE | DIMENSIONS




Size	X (mm)	Y (mm)	Z (mm)	Kg
01	1210	ø 83	ø 89	3,1
02	1590	ø 83	ø 89	3,8

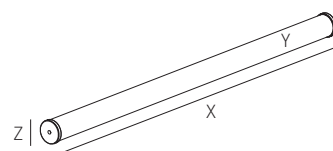


Min and Max room temperature: -20°+45° C.

LIBRA ACCESSORIES NOT INCLUDED




YKT10207 + ○ COLOUR

Rose ceiling for suspension installation Ø 60 mm
 Height (30 mm)
 2 suspension cables, lenght: 2 mt

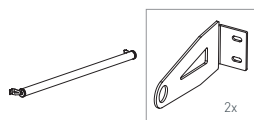

YKT10209S + ○ COLOUR

Bracket for wall/ceiling mounting system
 (2 pcs)

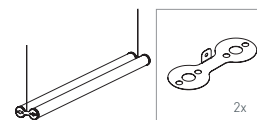

YKT10209D + ○ COLOUR

Bracket for double suspensions
 (2 pcs)
 To be ordered together with YKT10207

LIBRA SPECIAL FEATURES

Special continuous line configuration to be agreed with the technical office.