

Nota/Note
Ottiche intercambiabili
Exchangeable optics

H 115 =500 mA
H 115 =600 mA
H 145 =700 mA
H 145 =800 mA

Orientabilità
Adjustability
Asse X / Axis X 45°
Asse Y / Axis Y 45°

MINI GIRO LENS

FASCIO/BEAM ST | MD | LA

Apparecchio LED da incasso orientabile
Adjustable recessed LED downlight.



Corpo in lamiera tornita, gruppo cardanico pressofuso in alluminio verniciato con polveri epossidiche previa fosfatazione. Dissipatore in alluminio estruso. Ottica in policarbonato lenticolare fascio largo (cod. LA) fascio medio (cod. MD) fascio stretto (cod. ST). Sorgente luminosa LED. Emissione diretta. Fissaggio ad incasso mediante molle. Alimentazione elettronica separata CAE. A richiesta: dimmerabile DALI (cod. DL). Specificare se con funzione Push Dim (cod. PD). Emergenza autonomia 1h/3h.

Turned sheet metal body, die-cast aluminium cardan group painted with epoxy powder after phosphating. Extruded aluminium heatsink. Lenticular polycarbonate louver wide beam (code LA) medium beam (code MD) narrow beam (code ST). LED light source. Direct light emission. Recessed fixing system with springs. Separate electronic driver CAE. On request: dimmable DALI (code DL). Push Dim function to be specified (code PD). Emergency autonomy 1h/3h.

Lumen	Watt	Lumen Watt Out	mA	Codice Code	Fascio Beam	K	Alimentazione Power Supply	Colore Colour
2150	18	≤ 120	500	HRMGRL1	ST: fascio stretto narrow beam	WW: 2700	-: CAE elettronica electronic DL: DALI	Standard: ● WI: White Irazu ● BLL: Black Lava Su richiesta /On request: ● SB: Silver Bombalai ● BL: Bronze Lario ● RR: Rust Rame ● BF: Beige Futura ● GK: Gold Karkar ● BT: Blue Telica
2550	22	≤ 116	600	HRMGRL2	MD: fascio medio medium beam	W: 3000 X: 3500		
2950	26	≤ 114	700	HRMGRL3	LA: fascio largo wide beam	N: 4000		
3350	30	≤ 112	800	HRMGRL4				



A richiesta | On request


Temperatura ambiente min. - max: -10°+40° C.
Lumen: flusso totale in uscita con 3000K CRI90;
Variazione flusso con CRI85 + 8%, con CRI95 - 8%.
Watt: potenza di sistema
Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.
Lumen: total output flux with 3000K CRI90;
Flux variation with CRI85 + 8%, with CRI95 - 8%.
Watt: system power
Tolerance ± 10%

Ottica ST 12°

Ottica MD 25°

Ottica LA 38°

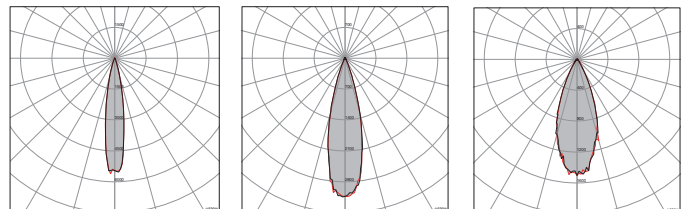

H (m)	Ø (m)	H (m)	Ø (m)	H (m)	Ø (m)
1	0.2	1	0.4	1	0.7
2	0.4	2	0.8	2	1.4
3	0.6	3	1.3	3	2.1
4	0.8	4	1.7	4	2.7
5	1.0	5	2.1	5	3.4