

Nota/Note
 Ottiche intercambiabili
 Exchangeable optics

MUSE 55 LENS UP

FASCIO/BEAM ST | MD | LA

Proiettore LED orientabile con ottiche intercambiabili.
 Fissaggio a plafone.
 Adjustable LED projector with exchangeable optics.
 Ceiling mounting system.

Corpo in estruso d'alluminio verniciato con polveri epossidiche previa fosfatazione. Dissipatore in alluminio estruso. Ottica in policarbonato lenticolare fascio largo (cod. LA) fascio medio (cod. MD) fascio stretto (cod. ST). Sorgente luminosa LED. Emissione diretta. Sistema di fissaggio a plafone. Alimentazione integrata nella basetta CAE. A richiesta dimmerabile DALI (cod. DL), alimentatore esterno.

Extruded aluminium body painted with epoxy powders after phosphating. Extruded aluminium heatsink. Lenticular polycarbonate louver wide beam (code LA) medium beam (code MD) narrow beam (code ST) LED light source. Direct light emission. Ceiling mounting system. Electronic driver built-in the mounting base CAE. On request: dimmable DALI (code DL). External driver.



Lumen	Watt	Lumen Watt Out	mA	Codice Code	Fascio Beam	K	Alimentazione Power Supply	Colore Colour
1100	9	≤ 122	250	HRM6UP1	ST: fascio stretto narrow beam	WW: 2700 W:3000 X:3500 N:4000	-: CAE elettronica electronic DL: DALI	Standard: ● WI: White Irazu ● BLL: Black Lava Su richiesta / On request: ● SB: Silver Bombalai ● BL: Bronze Lario ● RR: Rust Rame ● BF: Beige Futura ● GK: Gold Karkar ● BT: Blue Telica
1550	13	≤ 119	350	HRM6UP2	MD: fascio medio medium beam			
2150	18,5	≤ 116	500	HRM6UP3	LA: fascio largo wide beam			



A richiesta | On request


Temperatura ambiente min. - max: -10°+40° C.
 Lumen: flusso totale in uscita con 3000K CRI90;
 Variazione flusso con CRI85 + 8%, con CRI95 - 8%.
 Watt: potenza di sistema
 Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.
 Lumen: total output flux with 3000K CRI90;
 Flux variation with CRI85 + 8%, with CRI95 - 8%.
 Watt: system power
 Tolerance ± 10%

Ottica ST 12°

Ottica MD 25°

Ottica LA 38°

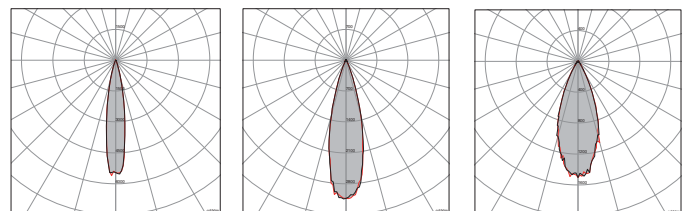

H (m)	Ø (m)	H (m)	Ø (m)	H (m)	Ø (m)
1	0.2	1	0.4	1	0.7
2	0.4	2	0.8	2	1.4
3	0.6	3	1.3	3	2.1
4	0.8	4	1.7	4	2.7
5	1.0	5	2.1	5	3.4