

Nota/Note
 Ottiche intercambiabili senza ausilio di utensili
 Exchangeable optics without using of tools

MUSE 80 I

FASCIO/BEAM EL | ST | MD | LA

Proiettore LED a binario orientabile con ottiche intercambiabili.
 Adjustable track-mounted LED projector, exchangeable optics.



Corpo in estruso d'alluminio verniciato con polveri epossidiche previa fosfatazione. Dissipatore in alluminio estruso. Ottica in policarbonato metallizzato fascio largo (cod. LA) fascio medio (cod. MD) fascio stretto (cod. ST) fascio ellittico (cod. EL). Sorgente luminosa LED. Emissione diretta. Sistema di fissaggio a binario (adattatore incluso). Alimentazione elettronica integrata nel corpo lampada CAE. A richiesta: dimmerabile DALI (cod. DL).

Extruded aluminium body painted with epoxy powders after phosphating. Extruded aluminium heatsink. Metallized polycarbonate louver wide beam (code LA) medium beam (code MD) narrow beam (code ST) elliptical beam (code EL). LED light source. Direct light emission. Track mounting system (adapter included). Built-in electronic driver in the body CAE. On request: dimmable DALI (code DL).

Lumen	Watt	Lumen Watt Out	mA	Codice Code	Fascio Beam	K	Alimentazione Power Supply	Colore Colour
2150	18	≤ 120	500	HRM8I1	EL: fascio ellittico elliptical beam	WW: 2700 W: 3000 X: 3500 N: 4000	-: CAE elettronica electronic DL: DALI	Standard: ● WI: White Irazu ● BLL: Black Lava Su richiesta /On request: ● SB: Silver Bombalai ● BL: Bronze Lario ● RR: Rust Rame ● BF: Beige Futura ● GK: Gold Karkar ● BT: Blue Telica
2550	22	≤ 114	600	HRM8I2	ST: fascio stretto narrow beam			
2950	26	≤ 112	700	HRM8I3	MD: fascio medio medium beam LA: fascio largo wide beam			




A richiesta | On request

Temperatura ambiente min. - max: -10°+40° C.
 Lumen: flusso totale in uscita con 3000K CRI90;
 Variazione flusso con CRI85 + 8%, con CRI95 - 8%.
 Watt: potenza di sistema
 Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.
 Lumen: total output flux with 3000K CRI90;
 Flux variation with CRI85 + 8%, with CRI95 - 8%.
 Watt: system power
 Tolerance ± 10%

Base per fissaggio a parete codice BK
 Wall mounting base cod. BK

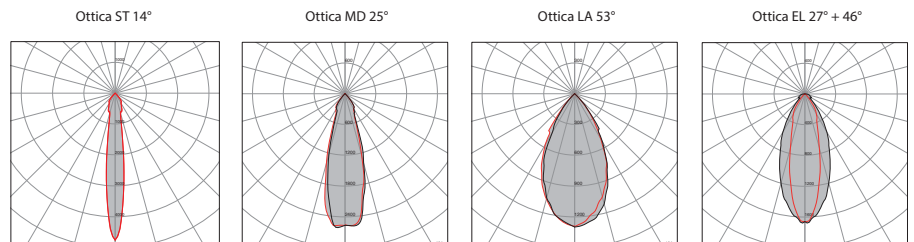

H (m)	Ø (m)	H (m)	Ø (m)	H (m)	Ø (m)	H (m)	Ø (m)
1	0.3	1	0.4	1	1.0	1	0.8
2	0.5	2	0.9	2	2.0	2	1.6
3	1.7	3	1.3	3	2.8	3	2.5
4	1.0	4	1.8	4	4.0	4	3.3
5	1.2	5	2.2	5	5.0	5	4.2