


RELAX LED SPA R

Apparecchio professionale LED a bassa luminanza.
LED professional lighting fitting, low luminance.

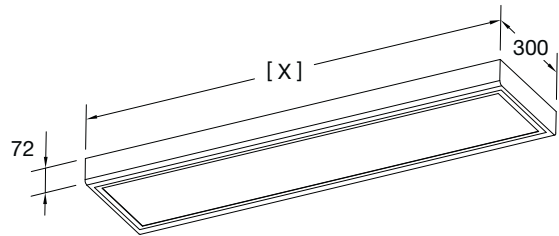

[X] Dimensioni disponibili | Available dimensions:
1160x300 mm - 1530x300 mm

Corpo e telaio in lamiera di acciaio pressopiegato con spigoli arrotondati, verniciata con polveri epossidiche previa fosfatazione. Ottica dark a bassa luminanza idonea in ambienti con videotermini (inferiori a 1000 cd/m² per angoli superiori a 65° trasversali e longitudinali).

Sistema di fissaggio a plafone o, a richiesta, a sospensione.

Sorgente luminosa LED. Emissione diretta.

Non idonea per l'applicazione esterna.

Alimentazione elettronica CAE.

A richiesta: dimmerabile DALI (cod. DL) specificare se con funzione PUSH DIM (cod. PD).

Bent steel sheet body and frame with rounded edges painted with epoxy powders after phosphating.

Low UGR optic suitable in rooms with VDT (lower than 1000 cd/m²) for angles >65° transversal and longitudinal.

Ceiling fixing system or, on request, suspension fixing system.

LED light source.


Direct light emission.

Not suitable for outdoor application.

Built in electronic driver CAE.

On request: dimmable DALI (code DL) PUSH DIM function (code PD) to be requested.

FOTOMETRIE | PHOTOMETRIES

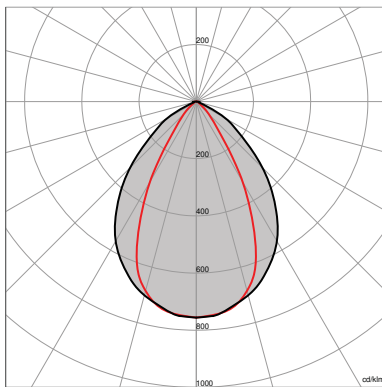

RELAX LED SPA

RELAX LED SPA R



5Y WARRANTY 5% FAILURE RATE	60.000 h LED LIFETIME L90B10	100.000 h LED LIFETIME L70B50
---------------------------------------	--	---

Relamping	Lumen LED*	Watt LED**	Lumen Out***	Watt	Lumen Watt Out	Configurazione LED LED configuration	Codice Code	K	Alimentazione Power Supply	Colore Colour
[X] Dimensioni/ <i>Dimensions</i> - 1160x300 mm										
2x36	6750	34	4520	37	> 122	=====	RXSAR40	W: 3.000	— : CAE A RICHIESTA <i>ON REQUEST</i>	01: bianco white
2x36	7900	41	5250	44	> 119	=====	RXSAR56	N: 4.000	DL: DALI PD: PUSH DIM	
[X] Dimensioni/ <i>Dimensions</i> - 1530x300 mm										
2x58	9000	46	5985	49	> 122	=====	RXSAR03	W: 3.000	— : CAE A RICHIESTA <i>ON REQUEST</i>	01: bianco white
2x58	10500	54,5	6960	58,5	> 119	=====	RXSAR06	N: 4.000	DL: DALI PD: PUSH DIM	

		>80 CRI	IP40 EN 60529	230 V 2014/35/UE	50/60 Hz	IK 07 EN 60068
850° EN 60695		RG 0 EN 62471		01 WHITE	SELV	16 UGR

TEMPERATURA AMBIENTE MIN E MAX | *MIN AND MAX ROOM TEMPERATURE: (-10° +40°)*

* Lumen nominali LED max a 25° | *Nominal lumen at max 25°*

** Potenza dei LED | *LED power*

*** Flusso totale in uscita dall'apparecchio a temperatura di lavoro (Ta 25° - 4.000 K) | *Total lighting fitting flux output at working temperature (Ta 25° - 4.000 K) | (3.000 K -8% - CRI 90 -10%)*

A RICHIESTA | *ON REQUEST*

>90 CRI	EM EN 60598-2-22	DL DALI	PD PUSH DIM
----------------------	----------------------------	-------------------	-----------------------

ACCESSORI

- KT102015** Giunto con rosone in fila continua.
- KT10440** KIT Sospensione (4 cavi d'acciaio L 2000 mm, n. 4 perni a regolazione millimetrica e n. 4 rosoni cilindrici)
- KT10441** KIT Sospensione bifido (2 cavi d'acciaio L 2000 mm, n. 2 cilindri di bilanciamento con cavo doppio e n. 2 rosoni cilindrici)
- KT10206** Kit rosone elettrificato completo di cavo trasparente L=2000mm 3x0,75 mm2, per soluzione CAE
- KT10206/D** Kit rosone elettrificato completo di cavo trasparente L=2000mm 5x0,75 mm2 per soluzione EM/DL

ACCESSORIES

- KT102015** Joint with ceiling rose for continuous line application.
- KT10440** Suspension KIT (no. 4 steel cables L 2000 mm, no. 4 precision adjustment pins and no. 4 cylindrical ceiling roses)
- KT10441** Split suspension KIT (no. 4 steel cables L 2000 mm, no. 2 balancing cylinder with double cable and no. 2 cylindrical ceiling roses)
- KT10206** Electrified ceiling rose complete with transparent cable L=2000mm 3x0,75 mm2, for CAE version
- KT10206/D** Electrified ceiling rose complete with transparent cable L=2000mm 5x0,75 mm2, for EM/DL version

Tolleranza dei valori indicati: +/- 10%. | *Tolerance of the indicated value: +/- 10%*

Con Ra > 90 riduzione del flusso luminoso pari al 10%. | *With CRI > 90 reduction of luminous flux is equal to 10%*

IDEALLUX s.r.l. si riserva il diritto di apportare modifiche migliorative sul prodotto in qualsiasi momento. |

IDEALLUX s.r.l. reserves the right to make improvements to the product at any time.