


# Round di



## Decorative suspension lighting fitting

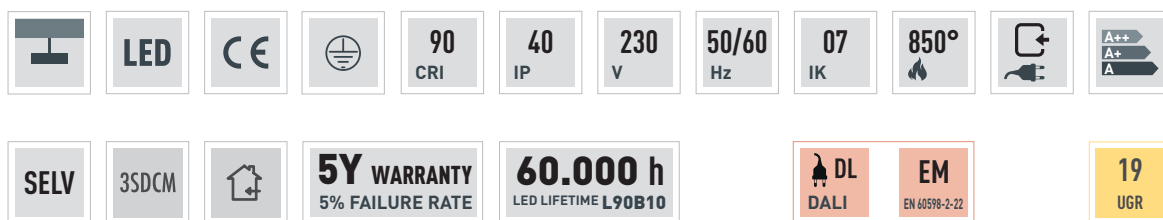

On request

Only for cod. MP

### IT

Apparecchio decorativo per installazione a sospensione. Corpo in alluminio tornito. Sorgente luminosa LED multichip diretta e indiretta. Verniciatura con polveri epossidiche antigraffio. Schermo di chiusura in policarbonato microprismato UGR 19 (cod. MP), opale (cod. OP). Alimentatore incorporato. Rosone per collegamento elettrico non incluso, da ordinare separatamente.

### ES

Luminaria decorativa de suspensión. Cuerpo en aluminio torneado. Fuente de iluminación LED directa y indirecta. Barnizado con polvo epoxi anti-rayado. Difusor de policarbonato opal (código OP), microprismado UGR19 (código MP). Balasto integrado. Roseta electrificada no incluida, a pedir por separada.

### EN

Decorative suspension lighting fitting, mounting. Turned aluminum body. Direct and indirect multichip LED light source. Painted with scratch-resistant epoxy powders. Opal polycarbonate diffuser (code OP), microprismatic UGR 19 (code MP). Built-in driver. Rose ceiling for electrical connection not included, to be ordered separately.

### DE

Dekoratives Hängebeleuchtungsgerät. Körper aus gedrehtem Aluminium. Direkte und indirekte LED-Lichtquelle. Lackiert mit kratzfesten Epoxidpulvern. Diffusor aus opalem Polycarbonat (Kode OP), mikroprismatisch UGR 19 (Kode MP). Integrierter Treiber. Rosette für elektrischen Anschluss nicht enthalten, separat zu bestellen.

### FR

Appareil décoratif en suspension. Corps en aluminium tourné. Source lumineuse LED multichip directe et indirecte. Finition de peinture en poudre époxy anti-rayures. Diffuseur en polycarbonate opal (réf. OP), microprismé UGR 19 (réf. MP). Alimentation avec driver intégré. Patère et branchement électrique exclus, à commander séparément.

# Round di



## ROUND di 4000 K

Code	Diffuser	Size	Lumen Out*	Watt Tot	K	Beam angle	Driver Type	Driver Nr.	Colour
YROI36N	<b>OP:</b> Opal	01	d 1710 + i 1135	34	4000	D	ON/OFF	1	○
YROI55N	<b>MP:</b> Microprismatic	02	d 10060 + i 1890	80	4000	D	ON/OFF	1	○
YROI75N	<b>MP:</b> Microprismatic	03	d 16765 + i 1890	134	4000	D	ON/OFF	1	○

## ROUND di 3000 K

Code	Diffuser	Size	Lumen Out*	Watt Tot	K	Beam angle	Driver Type	Driver Nr.	Colour
YROI36W	<b>OP:</b> Opal	01	d 1583 + i 1050	34	3000	D	ON/OFF	1	○
YROI55W	<b>MP:</b> Microprismatic	02	d 9314 + i 1750	80	3000	D	ON/OFF	1	○
YROI75W	<b>MP:</b> Microprismatic	03	d 15523 + i 1750	134	3000	D	ON/OFF	1	○

\*Output flux with opal diffuser. With microprismatic diffuser + 10%


## ROUND di STANDARD COLOUR SELECTION

● **WI** | White Irazu    ● **BLL** | Black Lava


## ROUND di ON REQUEST COLOUR SELECTION

● **BF** | Beige Futuna    ● **SB** | Silver Bombalai    ● **GK** | Gold Karkar  
● **BL** | Bronze Lario    ● **RR** | Rust Rame    ● **BT** | Blue Telica

## ROUND di BEAM ANGLE | DIMENSIONS



Size	X (mm)	Z (mm)	Kg
<b>01</b>	∅ 360	90	3,7
<b>02</b>	∅ 550	110	5,8
<b>03</b>	∅ 750	110	8,0



Min and Max room temperature: -20°+45° C.

## ROUND ACCESSORIES



### YKT35 + ○ COLOUR

Rose ceiling for brick installation ∅ 120 mm H 25 mm  
3 suspension cables, length: 2 mt.