

SOO re



Decorative suspension lighting fitting



On request

Only for cod. MP

IT

Apparecchio decorativo per installazione a sospensione. Corpo ultrapiatto in estruso di alluminio calandrato. Sorgente luminosa LED esterna. Verniciatura con polveri epossidiche antigraffio. Diffusore in policarbonato opale (cod. OP), microprismato UGR 19 (cod. MP). Fornito completo di sospensioni in acciaio regolabili e cavo di alimentazione L=2m. Alimentatore incluso esterno. Rosone con collegamento elettrico non incluso, da ordinare separatamente.

EN

Decorative suspension lighting fitting. Extruded calendered aluminum ultra-flat body. External LED light source. Painted with scratch-resistant epoxy powders. Opal polycarbonate diffuser (code OP), microprismatic UGR 19 (code MP). Supplied complete with adjustable steel suspensions and power cable L = 2m. External driver included. Rose ceiling for electrical connection not included, to be ordered separately.

FR


Appareil décoratif en suspension. Corps extra plat en aluminium extrudé courbé. Source lumineuse LED externe. Finition de peinture en poudre époxy anti-rayures. Diffuseur en polycarbonate opal (réf. OP), microprismé UGR 19 (réf. MP). Fourni avec fils de suspensions en acier réglables et câble d'alimentation L= 2mt. Driver externe inclus. Patère et branchement électrique exclus, à commander séparément.

ES

Luminaria decorativa de suspensión. Cuerpo ultraplano de aluminio extruido calandrado. Fuente de iluminación LED externo. Barnizado con polvo epoxi anti-rayado. Difusor de policarbonato opal (código OP), microprismato UGR19 (código MP). Cables de suspensión de acero ajustables y cable de alimentación L=2m incluidos. Balasto externo incluido. Roseta electrificada no incluida, a pedir por separado.

DE

Dekoratives Hängebeleuchtungsgerät. Ultraflacher Körper aus extrudiertem, kalandriertem Aluminium. Externe LED-Lichtquelle. Lackiert mit kratzfesten Epoxidpulvern. Diffusor aus opalem Polycarbonat (Kode OP), mikroprismatisch UGR 19 (Kode MP). Komplett mit verstellbaren Stahlhängungen und Netzkabel L = 2m. Externer elektronischer Treiber enthalten. Deckenbefestigung für elektrische Verbindung nicht enthalten, separat zu bestellen.

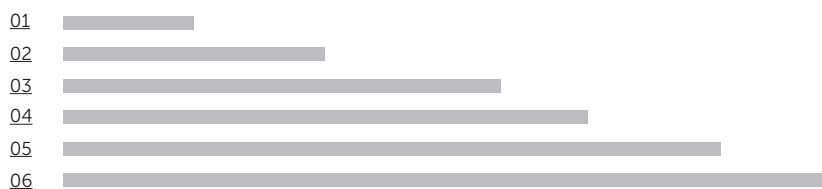

SOO re 4000 K

Code	Diffuser	Size	Lumen Out*	Watt Tot	K	Beam angle	Driver Type	Driver Nr.	Colour
YSRE03N		01	1615	19	4000	D	ON/OFF	1	○
YSRE06N	OP: Opal	02	3400	40	4000	D	ON/OFF	1	○
YSRE10N		03	5700	67	4000	D	ON/OFF	1	○
YSRE12N	MP: Microprismatic	04	6848	82	4000	D	ON/OFF	1	○
YSRE15N		05	8500	100	4000	D	ON/OFF	1	○
YSRE17N		06	9350	110	4000	D	ON/OFF	1	○

SOO re 3000 K

Code	Diffuser	Size	Lumen Out*	Watt Tot	K	Beam angle	Driver Type	Driver Nr.	Colour
YSRE03W		01	1485	19	3000	D	ON/OFF	1	○
YSRE06W	OP: Opal	02	3130	40	3000	D	ON/OFF	1	○
YSRE10W		03	5250	67	3000	D	ON/OFF	1	○
YSRE12W	MP: Microprismatic	04	6300	82	3000	D	ON/OFF	1	○
YSRE15W		05	7820	100	3000	D	ON/OFF	1	○
YSRE17W		06	8600	110	3000	D	ON/OFF	1	○

*Output flux with opal diffuser. With microprismatic diffuser + 10%


SOO re STANDARD COLOUR SELECTION

● **WI** | White Irazu ● **BLL** | Black Lava


SOO re ON REQUEST COLOUR SELECTION

● **BF** | Beige Futuna ● **SB** | Silver Bombalai ● **GK** | Gold Karkar
● **BL** | Bronze Lario ● **RR** | Rust Rame ● **BT** | Blue Telica

SOO re BEAM ANGLE | DIMENSIONS







Size	X* [mm]	Y [mm]	Z [mm]	Kg
01	∅ 300	50	10	0,8
02	∅ 600	50	10	1,7
03	∅ 1000	50	10	2,8
04	∅ 1200	50	10	3,4
05	∅ 1500	50	10	4,5
06	∅ 1700	50	10	5,0

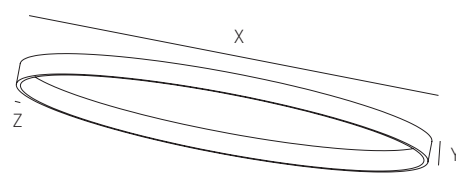

*Customizable diameters between ∅ 300mm and ∅ 1700mm

Min and Max room temperature: -20°+45° C.

SOO ACCESSORIES



KT10301 + ○ COLOUR

Rose ceiling for installation with ceiling panel, remote driver.

YSR-KRO230 + ○ COLOUR (max 60W) ∅ 230 H45

YSR-KRO290 + ○ COLOUR (max 110W) ∅ 290 H45

Rose ceiling for brick installation with driver housing.

YKT10401 + ○ COLOUR

Rose ceiling for brick installation with driver housing.

YKT10402 + ○ COLOUR

Rose ceiling for brick installation with driver housing.