

# TUBÌ MICRO

## FASCIO/BEAM MD | LA

Sospensione tubolare decorativa Ø 40.  
Decorative tubular suspension Ø 40.

Corpo in estruso d'alluminio verniciato con polveri epossidiche previa fosfatazione. Dissipatore in alluminio estruso. Ottica in policarbonato metallizzato fascio largo (cod. LA) fascio medio (cod. MD). Sorgente luminosa LED. Emissione diretta. Sistema di fissaggio a sospensione (completo di cavo L. 2 mt e rosone) o a plafone. Alimentazione elettronica integrata CAE (per S100 alimentazione remota). A richiesta: dimmerabile DALI (cod. DL) specificare se con funzione PUSH DIM (cod. PD) alimentazione remota.

Extruded aluminium body painted with epoxy powders after phosphating. Extruded aluminium heatsink. Metallized polycarbonate louver wide beam (code LA) medium beam (code MD). LED light source. Direct light emission. Suspension mounting system (complete with cable 2 mt length and ceiling rose) or ceiling mounting system. Built-in electronic driver CAE (Remote driver only for S100). On request: dimmable DALI (code DL) PUSH DIM function (code PD) to be requested, remote power supply.

**5Y WARRANTY**  
5% FAILURE RATE

**60.000 h**  
LED LIFETIME L70B10

**100.000 h**  
LED LIFETIME L70B50

Lumen	Watt	Lumen Watt Out	mA	Codice Code	Fascio Beam	K	Alimentazione Power Supply	Colore Colour
<b>TUBÌ M S100</b> 620	6,5	≤ 96	180	<b>HRTMS1</b>	<b>MD:</b> fascio medio medium beam  <b>LA:</b> fascio largo wide beam	<b>WW:</b> 2700 <b>W:</b> 3000 <b>N:</b> 4000	<b>-:</b> CAE elettronica electronic  <b>DL:</b> DALI	<b>Standard:</b> ● <b>WL:</b> White Irazu ● <b>BLL:</b> Black Lava  <b>Su richiesta / On request:</b> ● <b>SB:</b> Silver Bombalai ● <b>BL:</b> Bronze Lario ● <b>RR:</b> Rust Rame ● <b>BF:</b> Beige Futura ● <b>GK:</b> Gold Karkar ● <b>BT:</b> Blue Telica
<b>TUBÌ M S200</b> 620	6,5	≤ 96	180	<b>HRTMS2</b>				
<b>TUBÌ M S300</b> 620	6,5	≤ 96	180	<b>HRTMS3</b>				
<b>TUBÌ M S400</b> 620	6,5	≤ 96	180	<b>HRTMS4</b>				
<b>TUBÌ M S500</b> 620	6,5	≤ 96	180	<b>HRTMS5</b>				

CE

⊕

>90  
CRI

3SDCM

IP44  
EN 60529

IK 07  
EN 60068

230 V  
2014/35/UE

50/60  
Hz

850°  
EN 60895

Flicker free

RG 0  
EN 62471

♻️

DL  
DALI

PD  
PUSH DIM


A richiesta | On request

Temperatura ambiente min. - max: -10°+40° C.  
Lumen: flusso totale in uscita con 3000K CRI90;  
Variazione flusso con CRI85 + 8%, con CRI95 - 8%.  
Watt: potenza di sistema  
Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.  
Lumen: total output flux with 3000K CRI90;  
Flux variation with CRI85 + 8%, with CRI95 - 8%.  
Watt: system power  
Tolerance ± 10%

Ottica MD 24°

Ottica LA 36°

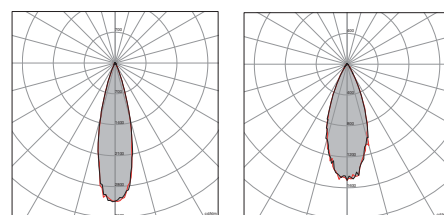

H (m)	Ø (m)	H (m)	Ø (m)
1	0.4	1	0.7
2	0.8	2	1.4
3	1.3	3	2.1
4	1.7	4	2.7
5	2.1	5	3.4