

Nota/Note
 Ottiche intercambiabili senza ausilio di utensili
 Exchangeable optics without using of tools

VALE S

FASCIO/BEAM EL | ST | MD | LA

Proiettore LED a binario orientabile con ottiche intercambiabili.
 Adjustable track-mounted LED projector, exchangeable optics.

5Y WARRANTY
5% FAILURE RATE
60.000 h
LED LIFETIME L90B10
100.000 h
LED LIFETIME L70B50


Lumen	Watt	Lumen Watt Out	mA	Codice Code	Fascio Beam	K	Alimentazione Power Supply	Colore Colour
2150	18	≤ 120	500	HRVAS1	EL: fascio ellittico elliptical beam	WW: 2700 W: 3000 X: 3500 N: 4000	-: CAE elettronica electronic DL: DALI	Standard: ● WI: White Irazu ● BLL: Black Lava Su richiesta /On request: ● SB: Silver Bombalai ● BL: Bronze Lario ● RR: Rust Rame ● BF: Beige Futura ● GK: Gold Karkar ● BT: Blue Telica
2950	26	≤ 114	700	HRVAS2	ST: fascio stretto narrow beam			
3350	30	≤ 112	800	HRVAS3	MD: fascio medio medium beam LA: fascio largo wide beam			

CE
IP44
>90 CRI
3SDCM
IK 07
230 V
50/60 Hz
850°
RG 0
DL DALI
DIM W
>80 CRI
>95 CRI
VIVID PLUS
VEG PLUS
WHITE PLUS
MEAT PLUS

A richiesta / On request

Temperatura ambiente min. - max: -10°+40° C.
 Lumen: flusso totale in uscita con 3000K CRI90;
 Variazione flusso con CRI85 + 8%, con CRI95 - 8%.
 Watt: potenza di sistema
 Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.
 Lumen: total output flux with 3000K CRI90;
 Flux variation with CRI85 + 8%, with CRI95 - 8%.
 Watt: system power
 Tolerance ± 10%

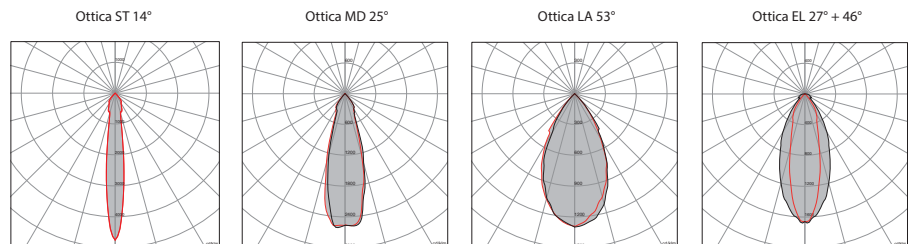

H (m)	Ø (m)	H (m)	Ø (m)	H (m)	Ø (m)	H (m)	Ø (m)
1	0.3	1	0.4	1	1.0	1	0.8
2	0.5	2	0.9	2	2.0	2	1.6
3	1.7	3	1.3	3	2.8	3	2.5
4	1.0	4	1.8	4	4.0	4	3.3
5	1.2	5	2.2	5	5.0	5	4.2