


# BINGO LED

## MICROPRISMATO/MICROPRISMATIC


Plafoniera per montaggio a sospensione accessorio **BDS-KS compreso** o plafone **BDS-KSP a richiesta**.  
 Testate di chiusura comprese.  
*Suspension light fitting (accessory **BDS-KS included**) or surface light fitting (accessory **BDS-KSP on request**).*  
*End covers included on both cases.*

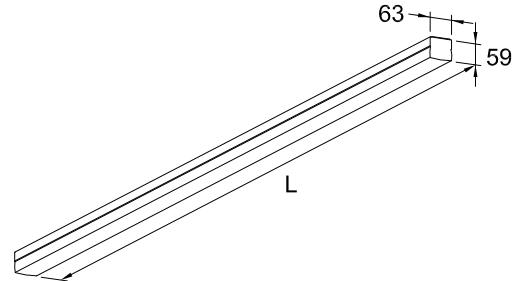


Corpo in lamiera d'acciaio pressopiegata vernicata con polveri epossidiche previa fosfatazione con vano passacavi.  
 Diffusore in policarbonato microprismato (a richiesta opale).  
 Sorgente luminosa a LED.  
 Emissione diretta.  
 Sistema di fissaggio a sospensione o plafone.  
 Alimentazione elettronica CAE.  
 A richiesta: dimmerabile DALI (cod. DL) specificare se con funzione PUSH DIM (cod. PD).

*Bent sheet steel body painted with epoxy powders after phosphating with cable compartment.*  
*Microprismatic polycarbonate diffuser (on request opal).*  
*LED light source.*  
*Direct light emission. Suspension or ceiling fixing system.*  
*Built-in electronic driver CAE.*  
*On request: dimmable DALI (code DL) PUSH DIM function (code PD) to be requested.*

## FOTOMETRIE | PHOTOMETRIES

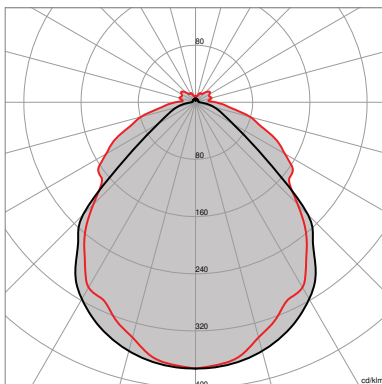

**BINGO LED**



**5Y WARRANTY**  
5% FAILURE RATE

**60.000 h**  
LED LIFETIME L90B10

**100.000 h**  
LED LIFETIME L70B50

| Relamping | Lumen LED*   | Watt LED** | Lumen OUT*** | Watt | Lumen Watt OUT | L Lunghezza L Length | Configurazione LED LED configuration | Codice Code   | K           | Alimentazione Power Supply  | Colore Colour                  |
|-----------|--------------|------------|--------------|------|----------------|----------------------|--------------------------------------|---------------|-------------|---|--------------------------------|
| 1x28      | <b>2050</b>  | 10         | 1620         | 11   | > 147          | 750 mm               | =====                                | <b>BDL13</b>  | N:<br>4.000 | --- : CAE<br>A RICHIESTA   ON REQUEST<br><b>DL</b> : DALI<br><b>PD</b> : PUSH DIM | <b>01</b> :<br>bianco<br>white |
| 1x28      | <b>2650</b>  | 13,5       | 2090         | 14,5 | > 144          | 750 mm               | =====                                | <b>BDL15</b>  |             |   |                                |
| 1x36      | <b>2870</b>  | 16         | 2267         | 17   | > 133          | 750 mm               | =====                                | <b>BDL17</b>  |             |   |                                |
| 1x36      | <b>3075</b>  | 16         | 4990         | 17   | > 147          | 1125 mm              | =====                                | <b>BDL18</b>  |             |   |                                |
| 1x54      | <b>3450</b>  | 20,5       | 3168         | 22   | > 144          | 1125 mm              | =====                                | <b>BDL22</b>  |             |   |                                |
| 1x58      | <b>4300</b>  | 23,5       | 3340         | 25   | > 133          | 1125 mm              | =====                                | <b>BDL25</b>  |             |   |                                |
| 1x49      | <b>4100</b>  | 20         | 3240         | 22   | > 147          | 1500 mm              | =====                                | <b>BDL26</b>  |             |   |                                |
| 1x58      | <b>5270</b>  | 27         | 4176         | 29   | > 144          | 1500 mm              | =====                                | <b>BDL30</b>  |             |   |                                |
| 1x72      | <b>5750</b>  | 32         | 4525         | 34   | > 133          | 1500 mm              | =====                                | <b>BDL34</b>  |             |   |                                |
| 2x28      | <b>4100</b>  | 20         | 3240         | 22   | > 147          | 750 mm               | =====                                | <b>BDL226</b> |             |   |                                |
| 2x28      | <b>5300</b>  | 27         | 4180         | 29   | > 144          | 750 mm               | =====                                | <b>BDL230</b> |             |   |                                |
| 2x36      | <b>5740</b>  | 32         | 4530         | 34   | > 133          | 750 mm               | =====                                | <b>BDL234</b> |             |   |                                |
| 2x36      | <b>6150</b>  | 32         | 4998         | 34   | > 147          | 1125 mm              | =====                                | <b>BDL236</b> |             |   |                                |
| 2x54      | <b>7900</b>  | 41         | 6336         | 44   | > 144          | 1125 mm              | =====                                | <b>BDL244</b> |             |   |                                |
| 2x58      | <b>8600</b>  | 47         | 6680         | 50   | > 133          | 1125 mm              | =====                                | <b>BDL250</b> |             |   |                                |
| 2x49      | <b>8200</b>  | 40         | 6480         | 44   | > 147          | 1500 mm              | =====                                | <b>BDL249</b> |             |   |                                |
| 2x58      | <b>10540</b> | 54         | 8352         | 58   | > 144          | 1500 mm              | =====                                | <b>BDL258</b> |             |   |                                |
| 1x72      | <b>11480</b> | 64         | 9050         | 68   | > 133          | 1500 mm              | =====                                | <b>BDL264</b> |             |   |                                |

|                         |  |                         |                         |                            |                    |                          |
|-------------------------|--|-------------------------|-------------------------|----------------------------|--------------------|--------------------------|
|                         |  | <b>&gt;80</b><br>CRI    | <b>IP50</b><br>EN 60529 | <b>230 V</b><br>2014/35/UE | <b>50/60</b><br>Hz | <b>IK 07</b><br>EN 60608 |
| <b>850°</b><br>EN 60695 |  | <b>RG 0</b><br>EN 62471 |                         | <b>01</b><br>WHITE         | <b>19</b><br>UGR   |                          |

TEMPERATURA AMBIENTE MIN E MAX | MIN AND MAX ROOM TEMPERATURE: **(-10° +40°)**

\* Lumen nominali LED max a 25° | Nominal lumen at max 25°






\*\* Potenza dei LED | LED power

\*\*\* Flusso totale in uscita dall'apparecchio a temperatura di lavoro (Ta 25° - 4.000 K) | Total lighting fitting flux output at working temperature (Ta 25° - 4.000 K) | (3.000 K -8% - CRI 90 -10%)

**A RICHIESTA | ON REQUEST**

|                      |                            |  |  |
|----------------------|----------------------------|--|--|
| <b>&gt;90</b><br>CRI | <b>EM</b><br>EN 60598-2-22 |  |  |
|----------------------|----------------------------|--|--|

ACCESSORI | ACCESSORIES -

|   | DESCRIZIONE ACCESSORIO<br>ACCESSORY DESCRIPTION   | IDONEO PER:<br>SUITABLE FOR: | CODICE<br>CODE |
|---|---|------------------------------|----------------|
|   | <p>Sistema di fissaggio per sospensione in acciaio zincato compreso top di chiusura (comprende 1 golfare, 1 piastra e 1 contropiastra).</p> <p><i>Suspension fixing kit made of zinc coated steel, including top cover (includes 1 eyebolt, 1 plate and 1 counter plate).</i></p>             | BINGO LED                    | <b>BDS-KS</b>  |
|   | <p>Staffa di fissaggio a plafone.</p> <p><i>Fixing bracket for ceiling mounted.</i></p>   | BINGO LED                    | <b>BDS-KSP</b> |
|   | <p>Kit sospensione:<br/><b>n. 1 cavo d'acciaio</b> L=2000 mm n. 1 morsetto automatico con regolazione millimetrica n. 2 rosone cilindrico</p> <p><i>Suspension kit:<br/><b>no. 1 steel cables</b> L=2000 mm no. 1 precision adjustment automatic hook no. 2 cylindrical ceiling roses</i></p> | BINGO SYSTEM LED             | <b>KT10411</b> |