




SOTTILE R

Sospensione industriale a LED per l'illuminazione di capannoni e di aree commerciali IP43.
IP43 LED industrial suspension fitting for lighting warehouses and commercial areas.

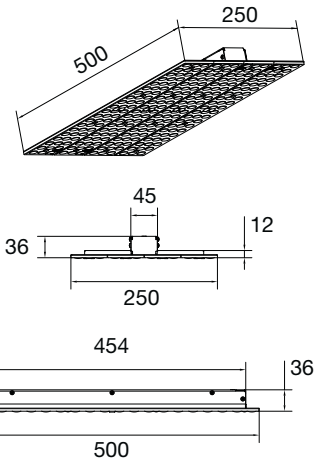

5Y WARRANTY

5% FAILURE RATE

60.000 h

LED LIFETIME L90B10

100.000 h

LED LIFETIME L70B50

A RICHIESTA | ON REQUEST

>90

CRI

EM

EN 60598-2-22

DL

DALI

PD

PUSH DIM

WIRELESS

Relamping	Lumen LED*	Watt LED**	Lumen Out***	Watt	Lumen Watt Out	Configurazione LED LED configuration	Codice Code	Lenti Lens	K	Alimentazione Power Supply	Colore Colour
4x55	13800	82	12640	86	> 146	=====	S0354	LA	W: 3.000 N: 4.000 C: 6.000	— : CAE A RICHIESTA ON REQUEST DL: DALI PD: PUSH DIM	01: bianco white
4x80	19000	122	17415	128	> 136	=====	S0504				
4x55	13800	82	12640	86	> 146	=====	S0354	ST			
4x80	19000	122	17415	128	> 136	=====	S0504				
4x55	13800	82	12640	86	> 146	=====	S0354	HR			
4x80	19000	122	17415	128	> 136	=====	S0504				
4x55	13800	82	12640	86	> 146	=====	S0354	BT			
4x80	19000	122	17415	128	> 136	=====	S0504				

CE

>80

CRI

IP43

EN 60529

230 V

2014/35/UE

50/60

Hz

IK 07

EN 60068

850°

EN 60695

A++

A+

A

RG 0

EN 62471

01

WHITE

TEMPERATURA AMBIENTE MIN E MAX | MIN AND MAX ROOM TEMPERATURE: (-10° +40°)

* Lumen nominali LED max a 25° | Nominal lumen at max 25°
** Potenza dei LED | LED power
*** Flusso totale in uscita dall'apparecchio a temperatura di lavoro (Ta 25° - 4.000 K) | Total lighting fitting flux output at working temperature (Ta 25° - 4.000 K) | (3.000 K -8% - CRI 90 -10%)