


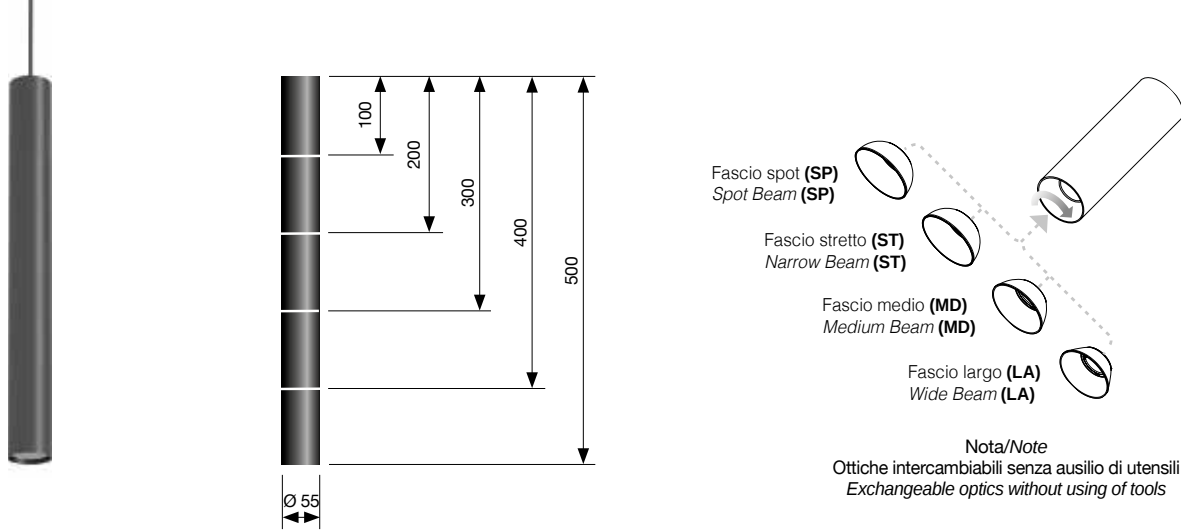

TUBI S

FASCIO/BEAM/FAISCEAU/HAZ SP | ST | MD | LA

Sospensione tubolare decorativa Ø 55.
Decorative tubular suspension Ø 55.
Suspension tubulaire décorative Ø55.
Suspensión decorativa tubular Ø55.

5Y WARRANTY
5% FAILURE RATE

60.000 h
LED LIFETIME L90B10

100.000 h
LED LIFETIME L70B50

RIPPLE
FREE

Lumen	Watt	Lumen Watt Out	mA	Codice Code	K	Fascio Beam	Alimentazione Power Supply	Colore Colour
TUBI S100*					WW: 2700 W:3000 X:3500 N:4000	SP: fascio spot spot beam ST: fascio stretto narrow beam MD: fascio medio medium beam LA: fascio largo wide beam	-: ON/OFF DL: DALI	Standard: ● WI: White Irazu ● BLL: Black Lava Su richiesta /On request: ● SB: Silver Bombalai ● BL: Bronze Lario ● RR: Rust Rame ● BF: Beige Futura ● GK: Gold Karkar ● BT: Blue Telica
1100	9	≤ 122	250	HRTS11				
1550	13	≤ 119	350	HRTS12				
TUBI S200								
1100	9	≤ 122	250	HRTS21				
1550	13	≤ 119	350	HRTS22				
TUBI S300								
1100	9	≤ 122	250	HRTS31				
1550	13	≤ 119	350	HRTS32				
1850	16	≤ 116	450	HRTS33				
TUBI S400								
1100	9	≤ 122	250	HRTS41				
1550	13	≤ 119	350	HRTS42				
1850	16	≤ 116	450	HRTS43				
TUBI S500								
1100	9	≤ 122	250	HRTS51				
1550	13	≤ 119	350	HRTS52				
1850	16	≤ 116	450	HRTS53				

CE

>90
CRI

3SDCM

IP20
EN 60529

IK 07
EN 60068

230 V
2014/25/EU

50/60
Hz

850+
EN 60695

RG 0
EN 62471

DL
DALI

PD
PUSH DIM

>95
CRI

A richiesta / On request

Temperatura ambiente min. - max: -10°+40° C.
Lumen: flusso totale in uscita con 3000K CRI90;
Variazione flusso con CRI85 + 8%, con CRI95 - 8%.
Watt: potenza di sistema
Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.
Lumen: total output flux with 3000K CRI90;
Flux variation with CRI85 + 8%, with CRI95 - 8%.
Watt: system power
Tolerance ± 10%

