

GDM1

GDM2

Fascio spot (SP)
Spot Beam (SP)

Fascio stretto (ST)
Narrow Beam (ST)

Fascio medio (MD)
Medium Beam (MD)

Fascio largo (LA)
Wide Beam (LA)

Nota/Note
 Ottiche intercambiabili senza ausilio di utensili
 Exchangeable optics without using of tools

	Lumen LED	Watt LED	Lumen Out	Watt Out	Lumen/Watt Out	Codice Code	K	Fascio Beam	Alimentazione Power Supply	Colore Colour
	4450	24	3700	25,5	>145	GDM1A	WW: 2.700	SP: fascio spot spot beam	— : ON/OFF DL: DALI PD: PUSH DIM	Standard: WI: withe irazu BLL: black lava
	5532	31,5	4595	34	>135	GDM1B	W: 3.000	ST: fascio stretto narrow beam		
	6833	36	5740	38	>151	GDM1C	X: 3.500	MD: fascio medio medium beam		
	8900	48	7400	51	>145	GDM2A	N: 4.000	LA: fascio largo wide beam		
	11064	63	9190	68	>135	GDM2B	MF: Meat Fish			
	13666	72	11480	76	>151	GDM2C				

5Y WARRANTY
 5% FAILURE RATE

60.000 h
 LED LIFETIME L90B10

100.000 h
 LED LIFETIME L70B50

CE

03
SDCM

>80
CRI

IP40
EN 60529

230 V
2014/35/UE

50/60
Hz

IK 07
EN 60068

850°
EN 60695

RG 0
EN 62471

01
WHITE

02
BLACK

>90
CRI

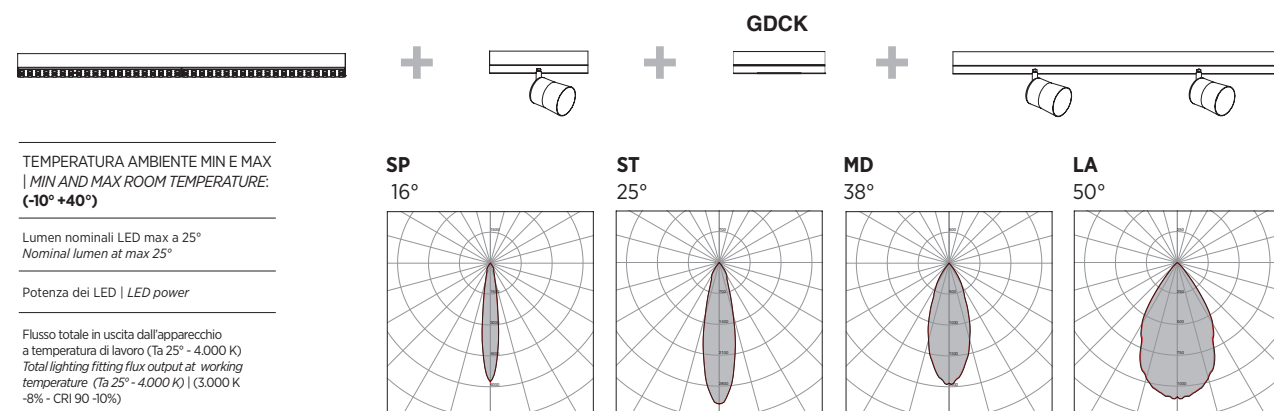
EM
EN 60598-2-32

DALI

PUSH DIM

A RICHIESTA | ON REQUEST

Esempio composizione / Composition example / Exemple de composition / Ejemplo de composición



A black, rectangular, dual-head track lighting fixture. The fixture has a long, thin rectangular body with two adjustable spotlights mounted on it. Each spotlight has a black cylindrical housing and a clear lens with a textured, grid-like pattern. The fixture is shown from a three-quarter perspective, highlighting its sleek, modern design.




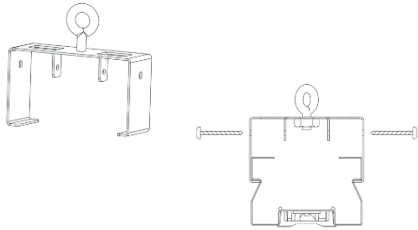
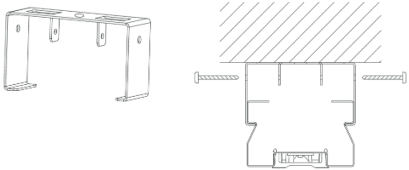
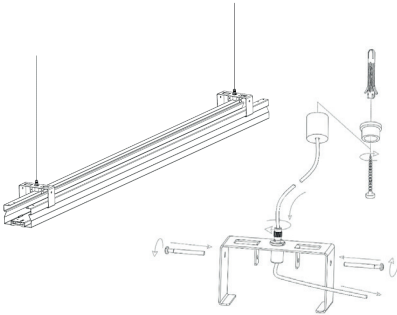
Colorazioni specifiche per alimenti a richiesta.

On request LED for food / Sur demande LED pour l'alimentaire / Led para alimentos a pedido.



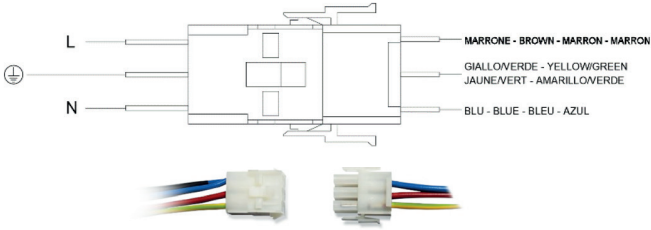
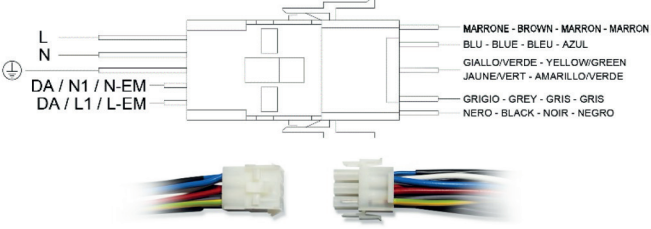
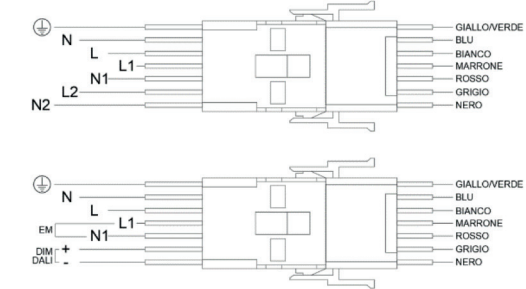
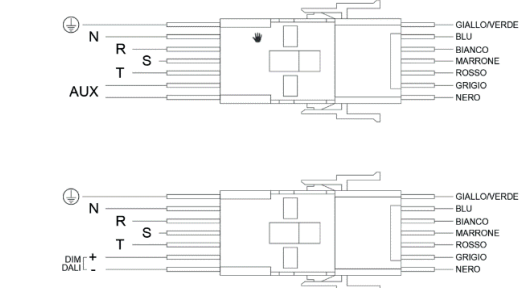
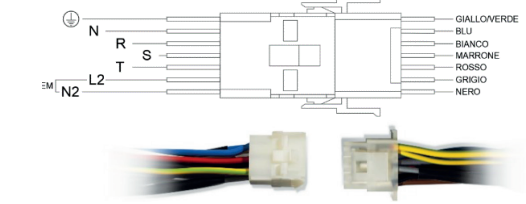
ACCESSORI

Accessories / Accessoires / Accessoires / Accesorios

	DESCRIZIONE ACCESSORIO ACCESSORY DESCRIPTION	CODICE CODE
	Terminale di chiusura. <i>End cover.</i> <i>Embout de fermeture.</i> <i>Tapa de cierre.</i>	GDOS-F
	Connettore di alimentazione. <i>Power connector.</i> <i>Connecteur d'alimentation.</i> <i>Conector de alimentación.</i>	BDS-A
	Giunto lineare a scomparsa. <i>Hidden linear joint.</i> <i>Élément de jonction linéaire invisible.</i> <i>Junto lineal retráctil.</i>	GDOS-G
	Sospensione semplice con occhiello. <i>Suspension fixing kit with eyebold.</i> <i>Suspension simple avec ceillet.</i> <i>Suspensión simple con ojal.</i>	GDOS-KS
	Fissaggio a plafone <i>Ceiling fixing system.</i> <i>Fixation au plafond.</i> <i>Fijación a techo.</i>	GDOS-KSP
	Staffa esterna per sospensione (completa di regolazione millimetrica, rosone a soffitto e cavo in acciaio L = 2000mm). <i>External suspension bracket (with precision adjustment, ceiling rose and steel cable L= 2000mm).</i> <i>Etrier externe pour suspension (à réglage millimétrique, patère pour plafond et filin en acier L:2m inclus).</i> <i>Soporte externo para suspensión (completo con perno de ajuste milimétrico, rosetón de techo y cable de acero L= 2000mm).</i>	GDOS-KSE

SCHEMI CABLAGGIO DISPONIBILI

Available wiring diagrams / Schémas de raccordement disponible / Esquemas de cableado disponibles

	DESCRIZIONE ACCESSORIO ACCESSORY DESCRIPTION	CODICE CODE
	Connettore monofase L + N + T. <i>Mono-phase connector L + N + T.</i> <i>Connecteur monophasé L+N+T</i> <i>Conector monofásico L + N + T.</i>	GDSC-3P A RICHIESTA ON REQUEST
	Connettore monofase con linea accessoria LNT + 2P (EM/DALI). Connecteur monophasé avec ligne optionnelle LNT + 2P (EM/DALI). <i>Connecteur monophasé avec ligne optionnelle LNT + 2P (EM/DALI).</i> <i>Conector monofásico con línea accesoria L N T + 2P (EMERGENCIA/DALI)</i>	GDSC-5P A RICHIESTA ON REQUEST
	Connettore trifase con L + N separati e possibilità linee accessorie (emergenza / DALI), doppia o tripla accensione. <i>Three-phase connector with separate L + N and possibility of accessory lines (emergency DALI), double or triple switching.</i> <i>Connecteur triphasé avec lignes optionnelles (secours/DALI), double ou triple allumage.</i>	GDSC-7P-LN STANDARD
	Connettore trifase con neutro comune e linea accessoria dedicata (emergenza / DALI) - tripla accensione. <i>Three-phase connector with common neutral and dedicated accessory line (emergency / DALI) - triple switch.</i> <i>Connecteur triphasé ave neutre commun et lignes optionnelles dédiées (secours/ DALI) - triple allumage.</i>	GDSC-7P-RST A RICHIESTA ON REQUEST
	Conector trifásico con neutro común y línea accessoria dedicada (EMERGENCIA/ DALI) - triple encendido.	